


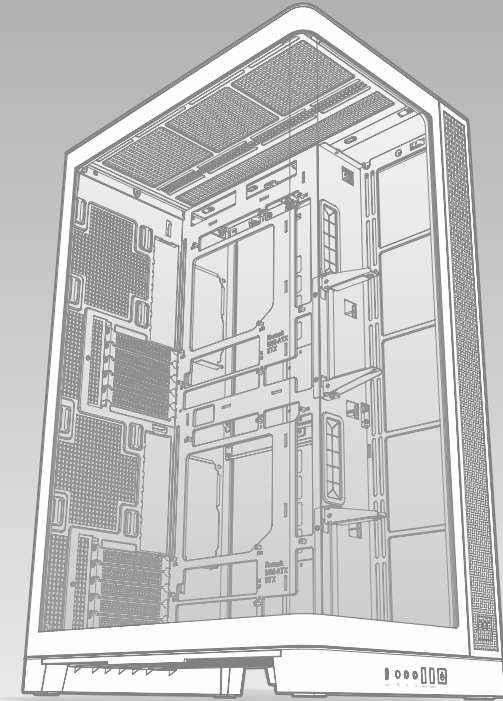

Dual System Chassis

CAPO X

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช

TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://tppremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermaltake.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermaltake.com/>

Global Facebook
<https://www.facebook.com/ThermaltakeInc>

Taiwan Facebook
<http://www.facebook.com/ThermaltakeTW>

Global community forums
<http://community.thermaltake.com>

CONTENTS



Chapter 1. Product Introduction

1.0	Specification	01
1.1	Accessory	02
1.2	Dimension & Clearance	03


Chapter 2. Installation Guide

2.0	Remove Panels	07
2.1	Power Supply Unit (PSU) Installation	09
2.2	Motherboard Installation	10
2.3	HDD Installation	11
2.4	VGA Card Installation	13
2.5	Air Cooling Installation	15
2.6	AIO Liquid Cooling Installation	16
2.7	DIY Liquid Cooling Installation	17
2.8	I/O Connection	18
2.9	Remove Filters	19


Case Type	Dual System Chassis		
Dimension (H*W*D)	691 x 305 x 448 mm (27.21 x 12.01 x 17.64 inch)		
Panel	Tempered Glass x 1		
Material	SPCC		
Cooling System	N / A		
Drive Bays	Upper (3 x 2.5" or 1 x 3.5" + 2 x 2.5"), Lower (2 x 2.5" or 1 x 3.5" + 1 x 2.5")		
Expansion Slots	10 Slots (5 for Upper / 5 for Lower)		
Motherboards	Upper System : 9.6" x 9.6" (Micro ATX), 6.7" x 6.7" (Mini ITX) Lower System : 9.6" x 9.6" (Micro ATX), 6.7" x 6.7" (Mini ITX)		
Hidden-Connector Motherboard	Upper System : 9.6" x 9.6" (Micro ATX) Lower System : 9.6" x 9.6" (Micro ATX)		
I/O Port	Upper System : USB 3.2 Gen 2 Type-C x 1, USB 3.0 x 2, HD Audio x 1 Lower System : USB 3.2 Gen 2 Type-C x 1, USB 3.0 x 2, HD Audio x 1		
PSU	Upper System : Standard PS2 PSU (optional) Lower System : Standard PS2 PSU (optional)		
Fan Support	Top	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm
	Right	5 x 120 mm, 4 x 120 mm, 3 x 120 mm, 2 x 120 mm, 1 x 120 mm	4 x 140 mm, 3 x 140 mm, 2 x 140 mm, 1 x 140 mm
	Rear	1 x 120 mm (Upper) 1 x 120 mm (Lower)	1 x 140 mm (Upper) 1 x 140 mm (Lower)
	Bottom	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm
Radiator Support	Top (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	1 x 280 mm, 1 x 140 mm
	Right (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	1 x 420 mm, 1 x 280 mm, 1 x 140 mm (2 x 280 mm)
	Rear (AIO)	1 x 120 mm, 1 x 140 mm (Upper System) 1 x 120 mm, 1 x 140 mm (Lower System)	
Clearances	CPU cooler height limitation	180 mm	
	VGA length limitation	420 mm	
	PSU length limitation	Upper System : A / 160 mm, B / 180 mm, C / 250 mm Lower System : D / 180 mm, E / 250 mm	

Figure	Parts Name	Q'ty	Used for
	Stand-off #6-32 x 6.5mm	5	Motherboard (Backup)
	Screw #6-32 x 6mm	12	Power Supply / VGA (Backup)
	Screw #6-32 x 5mm	10	3.5" HDD
	Screw M3 x 5mm	32	Motherboard / 2.5"SSD/HDD
	Screw T5 x 10mm	8	Case Fan
	Screw #6-32 x 5mm	10	VGA Holder / Side Panel & HDD Plate (Backup)
	Zip Ties	20	Cable Management
	Buzzer	2	Motherboard Alarm
	Stand-off tool	1	Motherboard Stand-off Installation
	Side Plate Clip	5	Side Panel (Backup)
	Velcro-1 meter	2	Cable Management
	VGA Holder	2	VGA


Chassis dimension

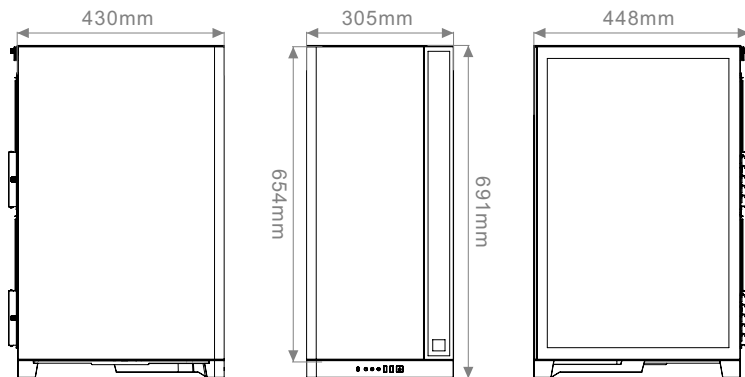


Motherboard Compatibility: ITX / mATX

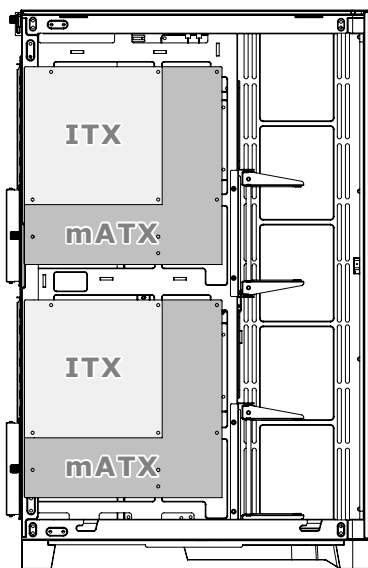


CPU cooler max height: 180mm

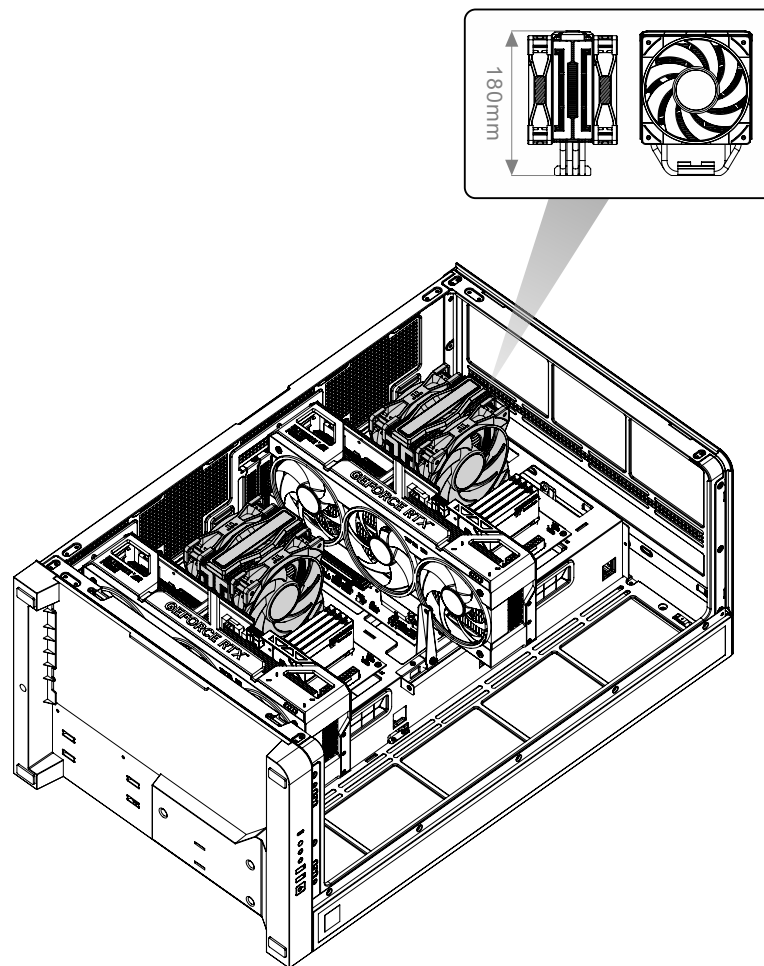


VGA max length: 420mm


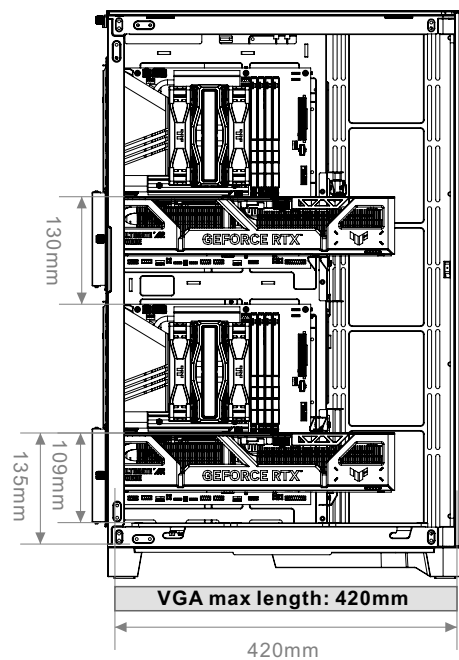


VGA max width: 170mm

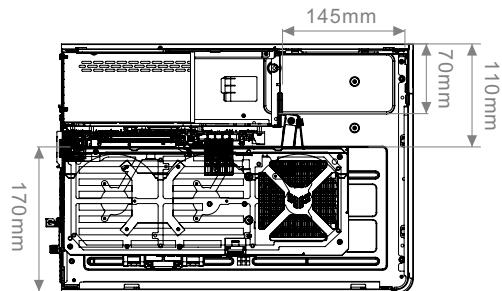


PSU max length: 250mm

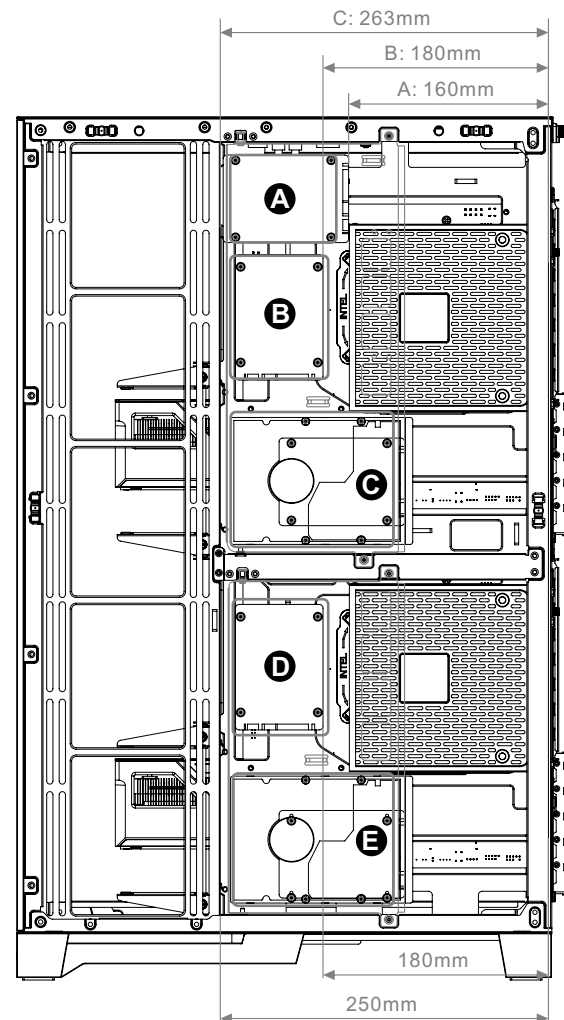

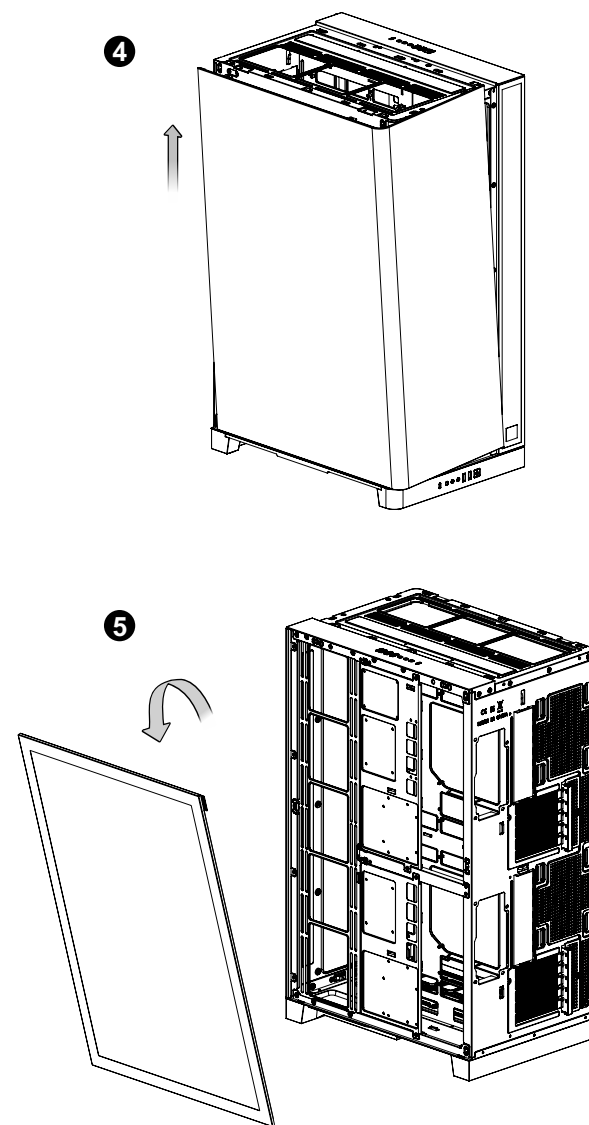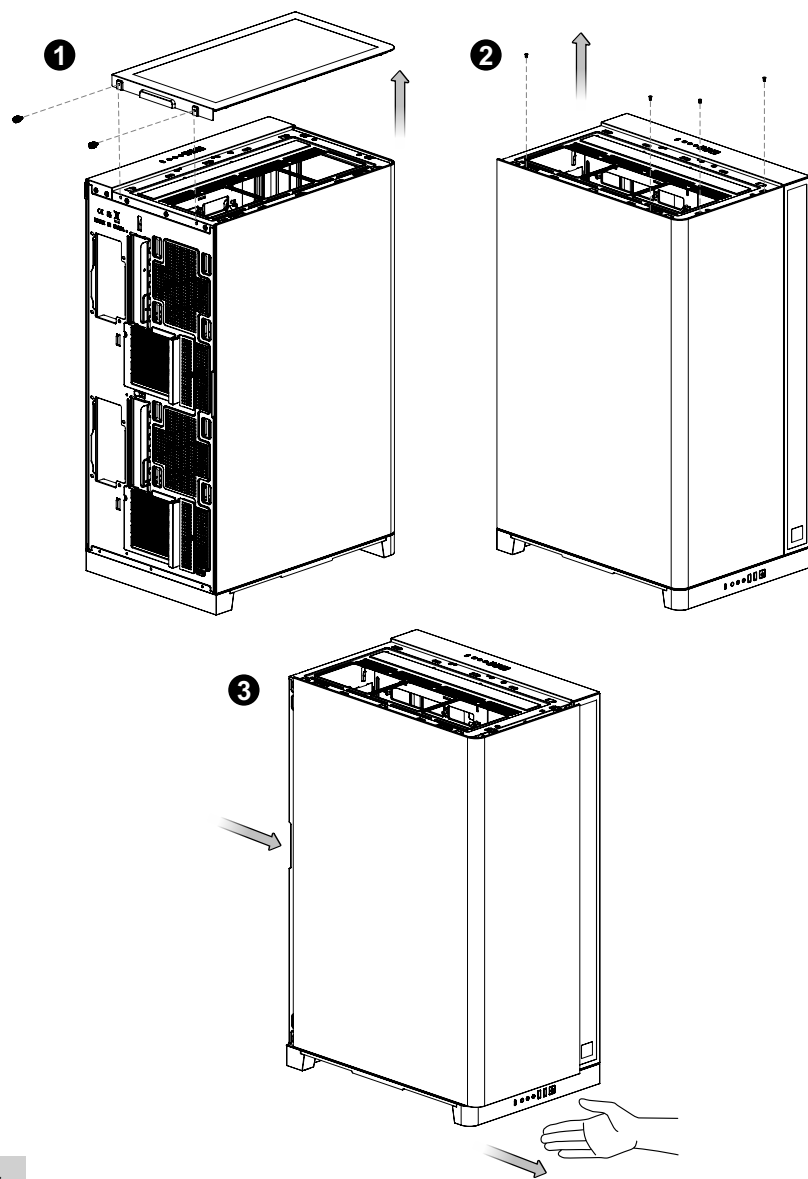





x 8

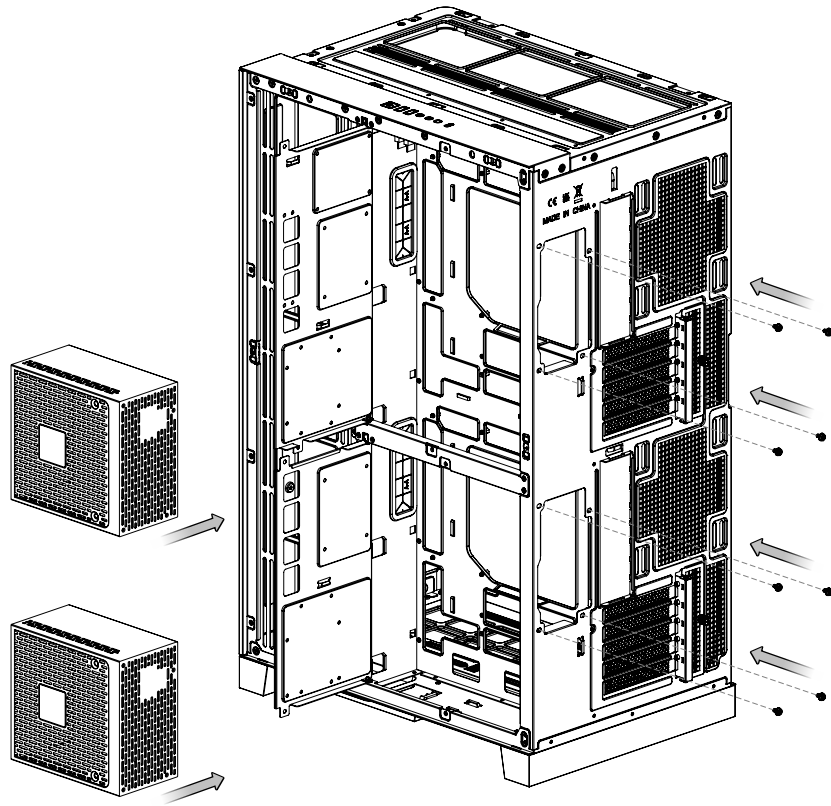

x 16

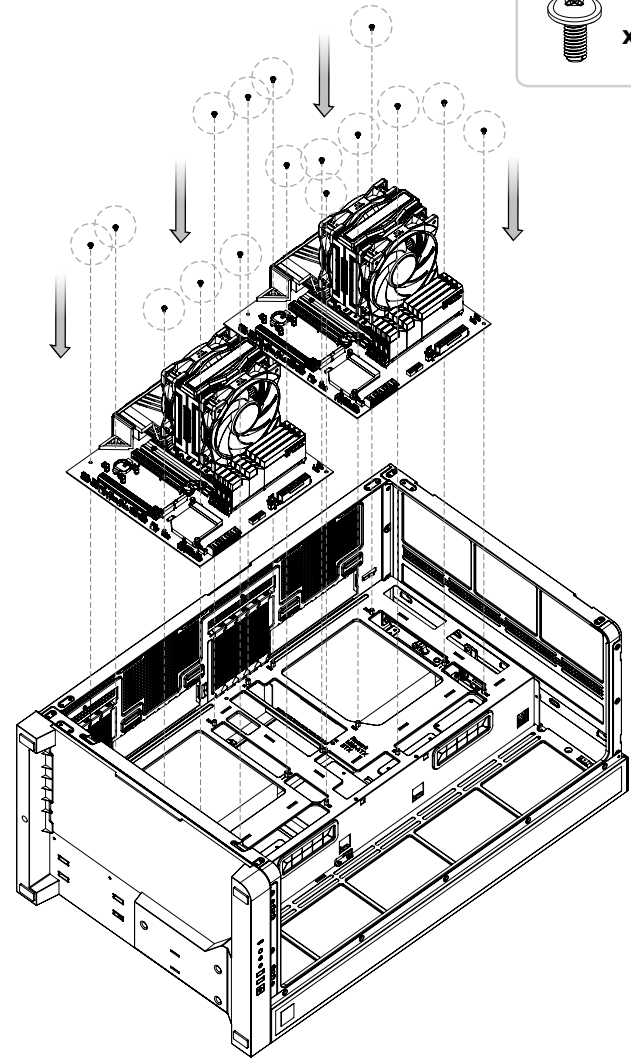


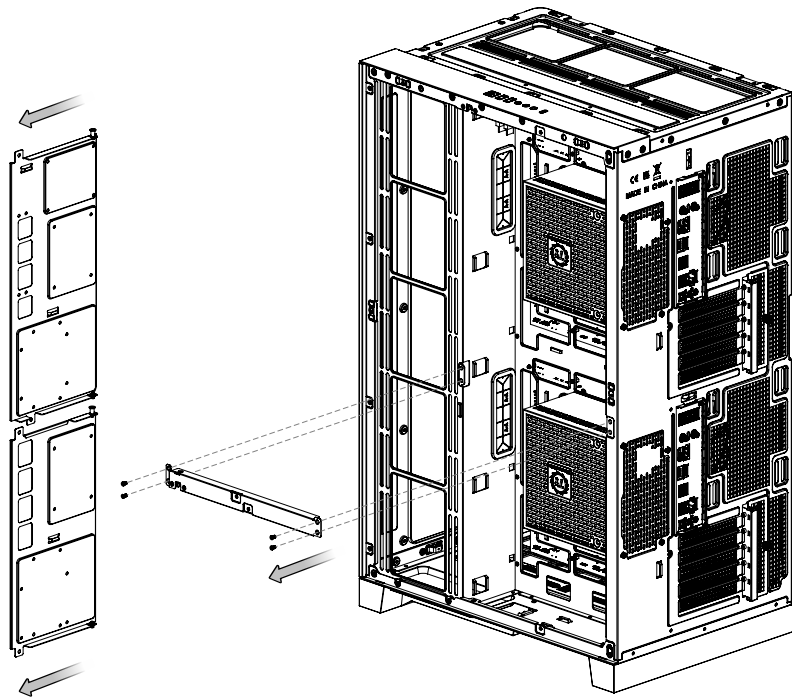

3.5" HDD




x 8




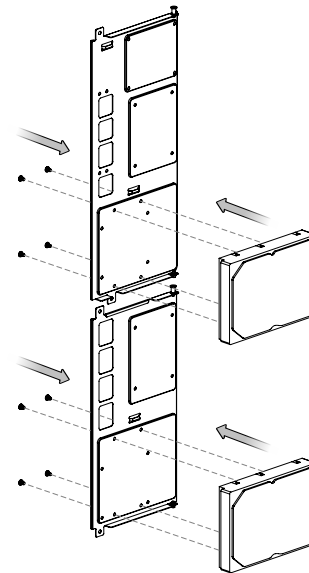




2.5" HDD




x 20

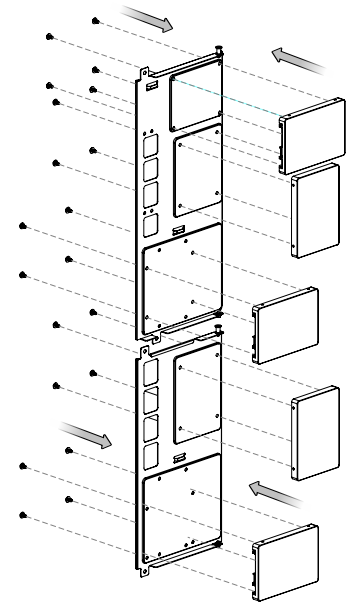


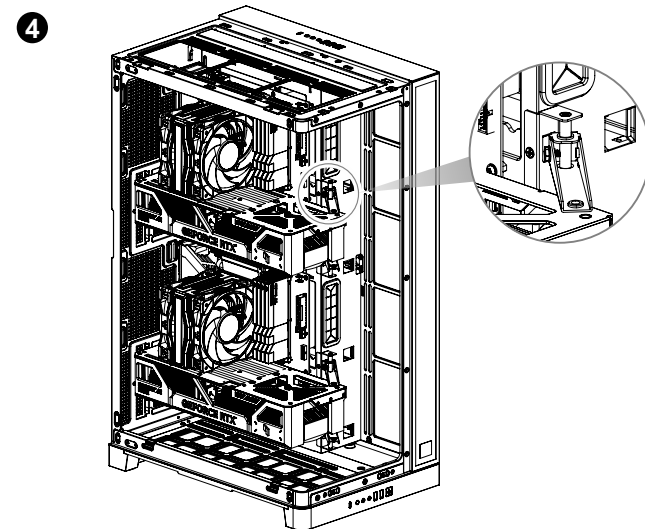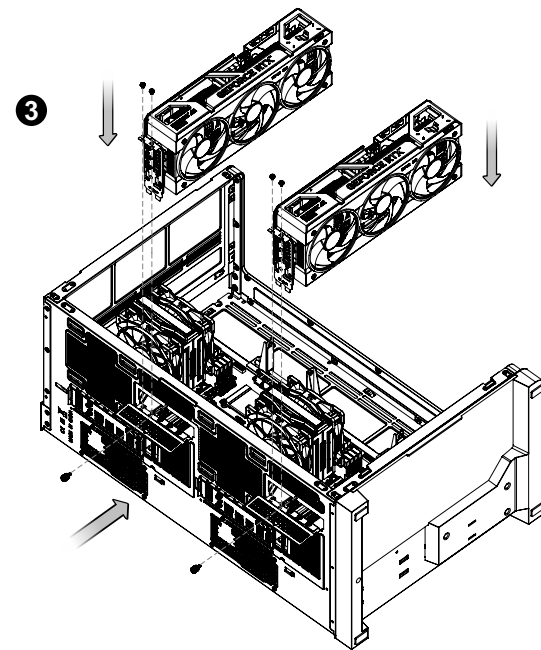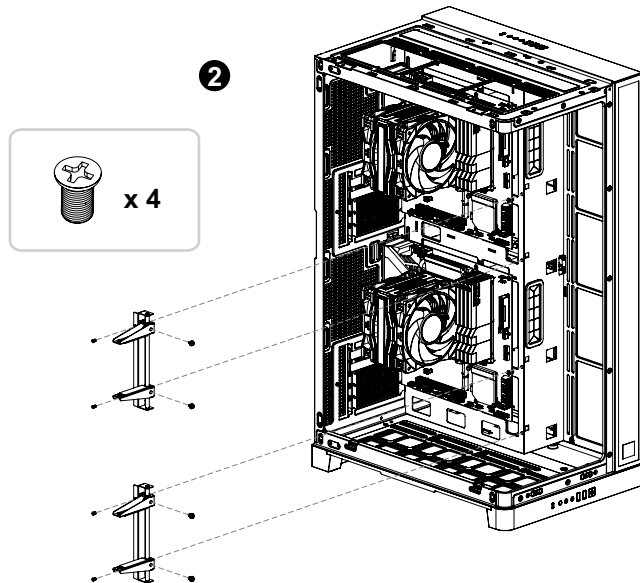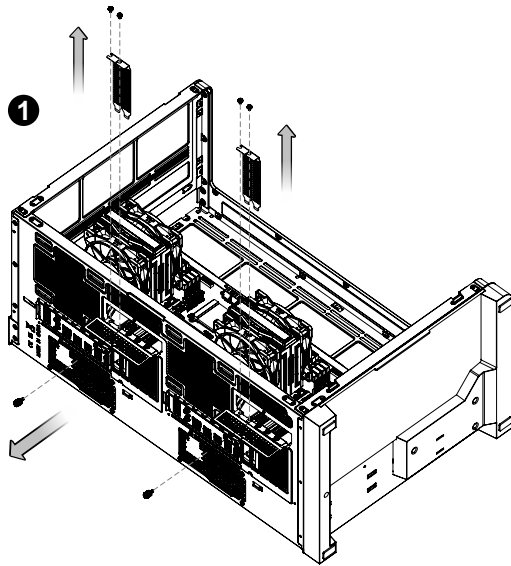

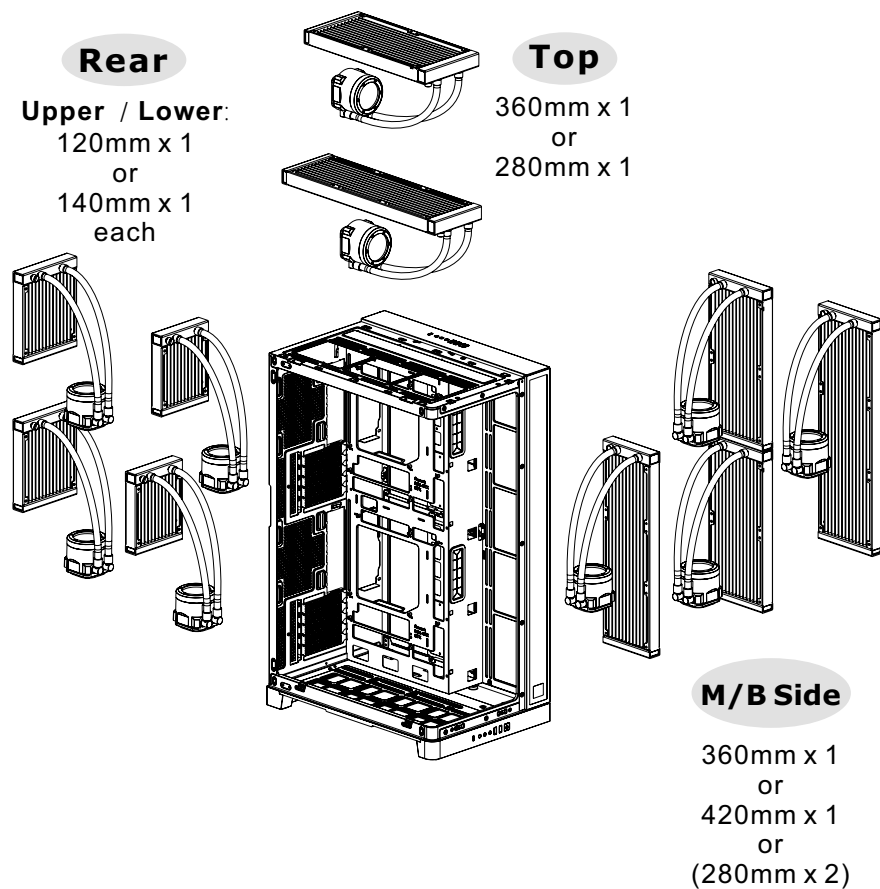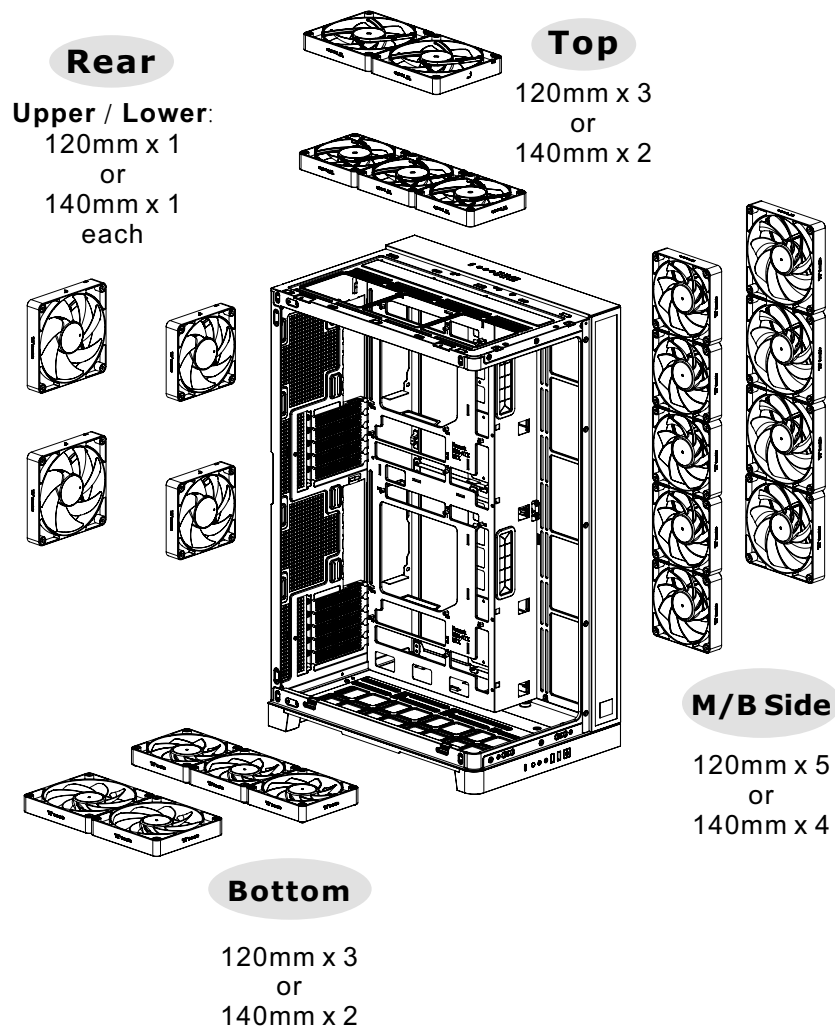


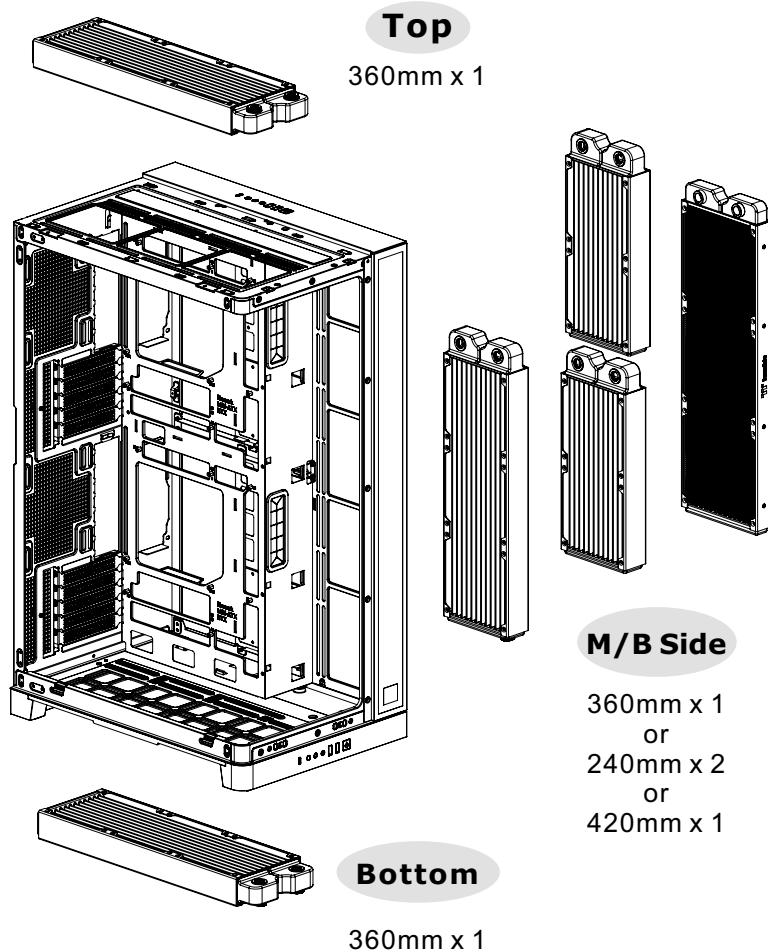


I/O Port

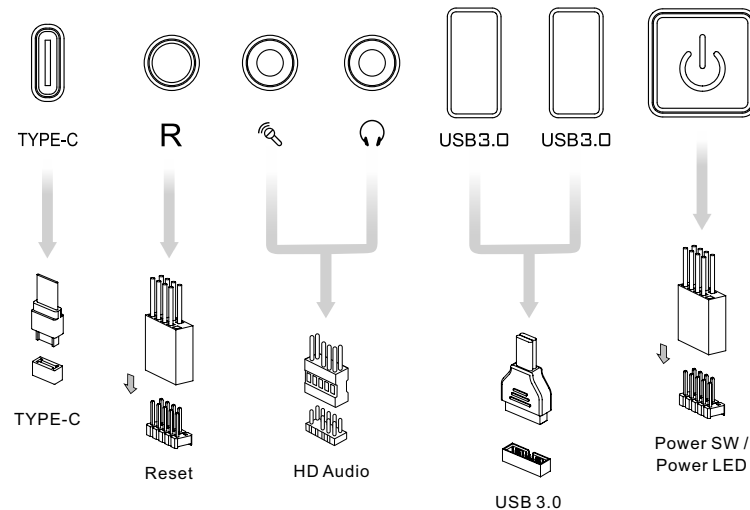

Motherboard Header Diagram

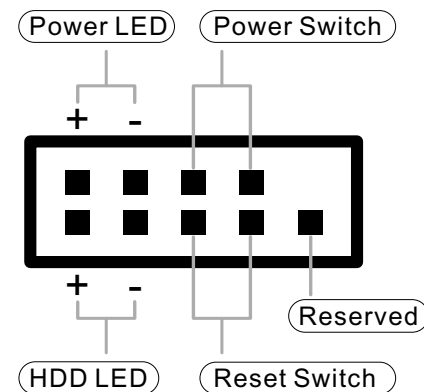

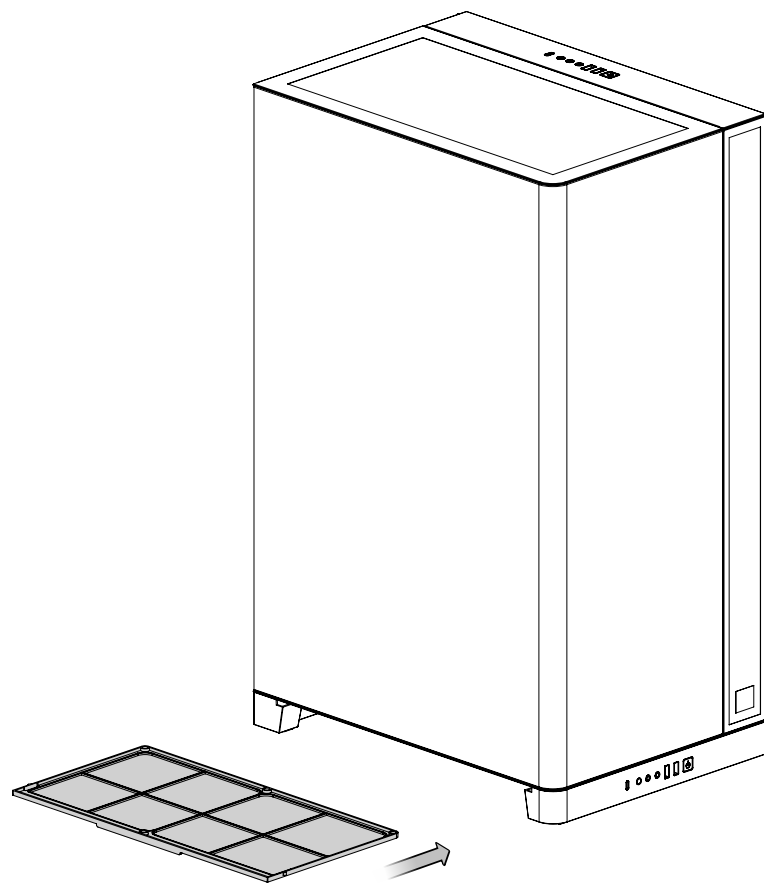

Bottom