

Congratulations on your new PC! Accessing the I/O panel and connecting your peripherals to the Tower 600 case is easy! Follow along this guide to learn how:

STEP 1

Remove the top cover by pulling up at the cutout on the back of the case.



STEP 2

For more space to access the I/O cutouts, remove the back panel by pulling on the notch at the top of the back panel.



STEP 3

Loosen the 2 thumb screws to swing the top fan bracket latch open to access the I/O ports from the top.

FRONT




BACK

Disconnect any fan cables as needed to fully remove the top fan bracket.

STEP 4

Feed your cables through the the cutouts on their corresponding sides.

FRONT

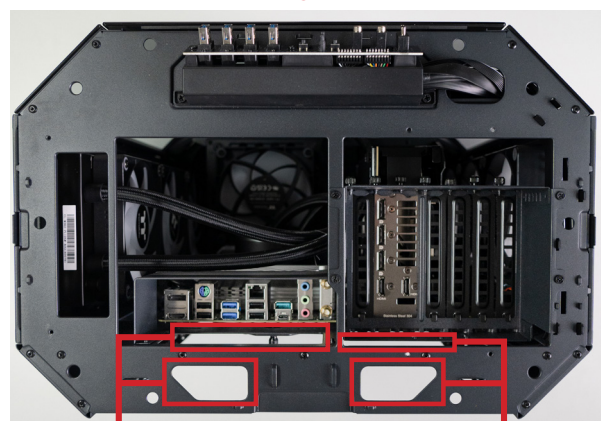

BACK

All other peripherals

Monitors and other displays



NEED ADDITIONAL HELP? CONTACT US:


Monday through Friday
9:00am - 5:30pm PT

888 - 570 - 5247

ttsupport@thermaltakeusa.com

STEP 5

Connect your peripherals into the corresponding port(s) in the motherboard I/O.

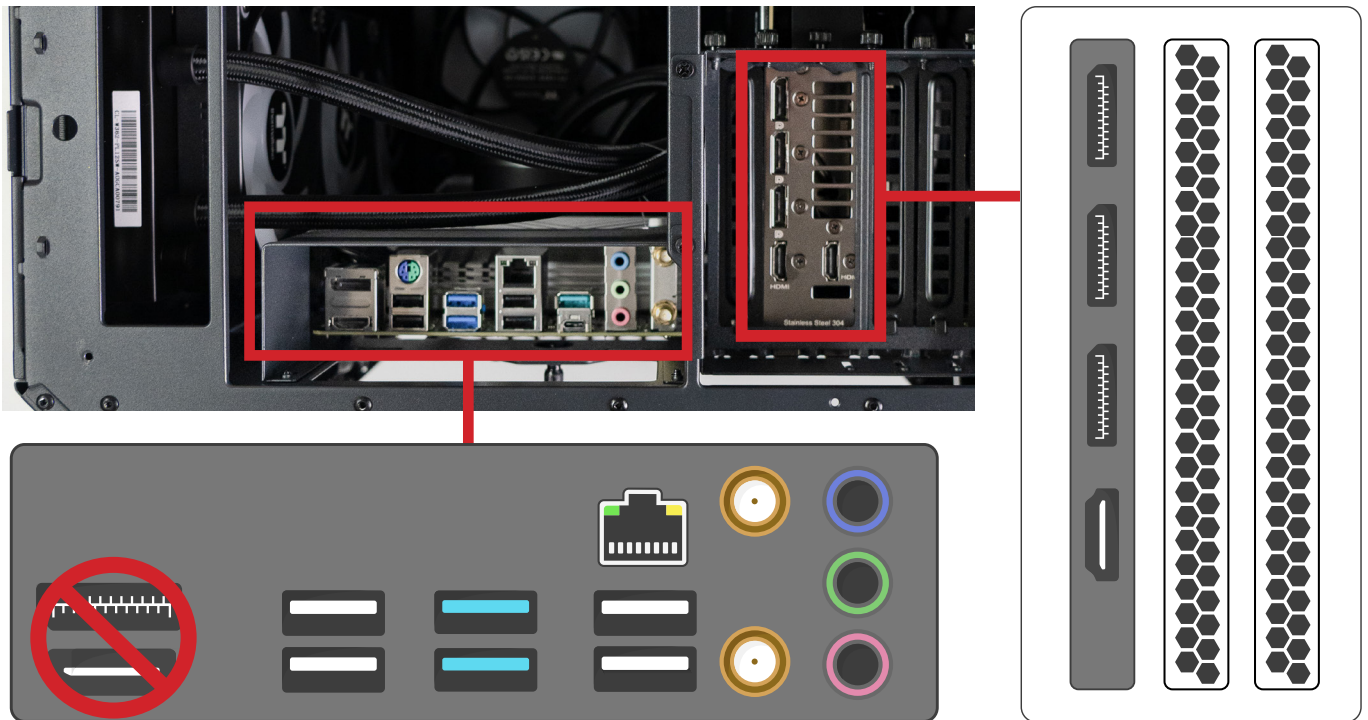

** Images for reference only. Port layouts may vary based on the included components.

For monitors and displays, connect directly to the appropriate port(s) on the graphics card/GPU.

Do NOT plug your monitor into the graphics port(s) on your motherboard, as it is disabled when a graphics card is installed in your system.

EXAMPLE OF FINAL CABLE WIRING ROUTE



NEED ADDITIONAL HELP? CONTACT US:

Monday through Friday
9:00am - 5:30pm PT

888 - 570 - 5247

ttsupport@thermaltakeusa.com