

View 290 TG ARGB

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช้



© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.04
All other registered trademarks belong to their respective companies. www.thermaltake.com



TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://tppremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermaltake.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermaltake.com/>

Global Facebook
<https://www.facebook.com/ThermaltakeInc>

Taiwan Facebook
<http://www.facebook.com/ThermaltakeTW>

Global community forums
<http://community.thermaltake.com>

CONTENTS














Chapter 1. Product Introduction

1.0	Specification	01
1.1	Accessory	02
1.2	Dimension & Clearance	03


Chapter 2. Installation Guide

2.0	Remove Panels	06
2.1	Power Supply Unit (PSU) Installation	07
2.2	Motherboard Installation	08
2.3	3.5" & 2.5" HDD Installation	09
2.4	VGA Card Installation	10
2.5	Air Cooling Installation	13
2.6	AIO Liquid Cooling Installation	14
2.7	I/O Connection	15
2.8	Remove Filters	16


Case Type	Mid Tower	
Dimension (H*W*D)	497 x 242 x 477 mm (19.57 x 9.53 x 18.78 inch)	
Panel	Curved TG Front Panel x1 / Tempered Glass x 1	
Material	SPCC	
Cooling System	Right (intake): 120 x 120 x 25 mm ARGB Lite Reverse fan (1000 ± 200 rpm, 21.9 dBA) x 2 Rear (exhaust): 120 x 120 x 25 mm ARGB Lite fan (1000 ± 200 rpm, 22.3 dBA) x 1	
Drive Bays	2 x 3.5" or 2 x 2.5"	
Expansion Slots	7 (Rotatable Patented Design)	
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)	
Hidden-Connector Motherboard	9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)	
I/O Port	USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1	
PSU	Standard PS2 PSU (optional)	
Fan Support	Top	3 x 120 mm, 2 x 140 mm
	Right	2 x 120 mm
	Rear	1 x 120 mm or 1 x 140 mm
	Power Cover	3 x 120 mm
Radiator Support	Top (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm 1 x 280 mm, 1 x 140 mm
	Right (AIO)	1 x 240 mm, 1 x 120 mm
Clearances	CPU cooler height limitation	180 mm
	VGA length limitation	450 mm
	PSU length limitation	200 mm

Figure	Parts Name	Q'ty	Used for
	Stand-off #6-32 x 6.5mm	3	Motherboard
	Screw #6-32 x 6mm	6	Power Supply
	Screw #6-32 x 5mm	10	3.5" HDD
	Screw M3 x 5mm	19	Motherboard/2.5" SSD/HDD/VGA Riser Cable
	Screw T5 x 10mm	8	Case Fan
	Screw #6-32 x 5mm	2	Bracket
	Screw #6-32 x 28mm	12	Case Fan on the Power Cover
	Stand-off #6-32 x 24mm	2	VGA Riser Cable
	Zip Ties	10	Cable Management
	Buzzer	1	Motherboard Alarm
	Nut Setter	1	Motherboard Stand-off Installation
	Side Plate Clip	3	Side Panel
	Velcro-1 meter	1	Cable Management


Chassis dimension

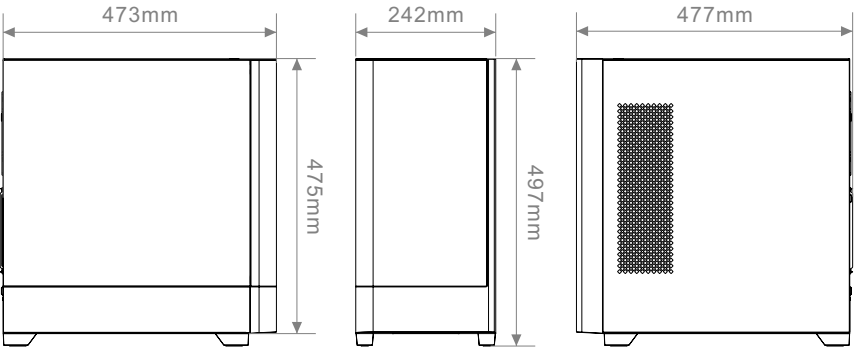


Motherboard Compatibility: ITX / mATX / ATX

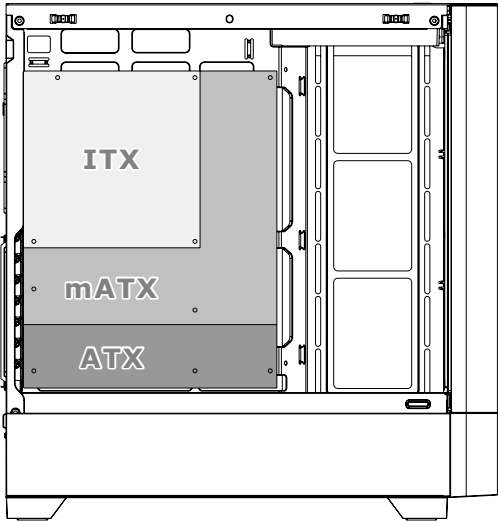





CPU cooler max height: 180mm



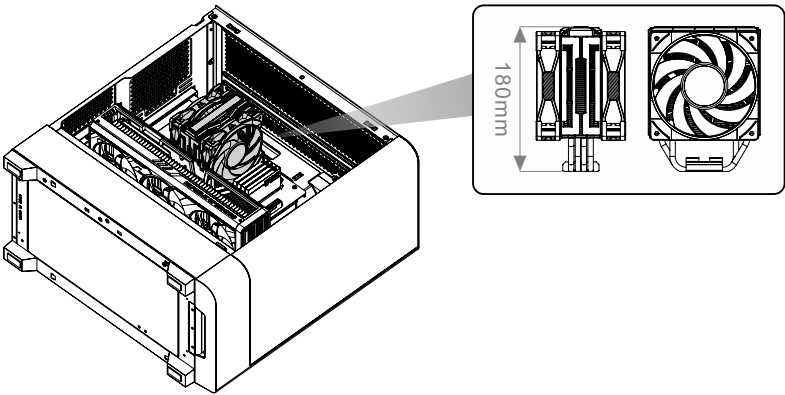



VGA max length: 450mm

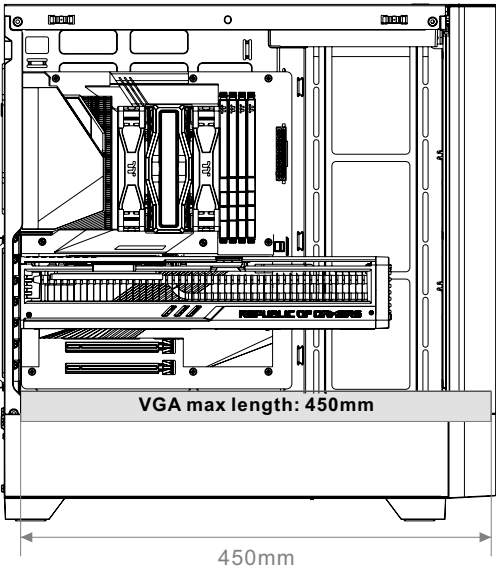



PSU length max length: 237mm (HDD cage at back side)
PSU length max length: 252mm (HDD cage at front side)

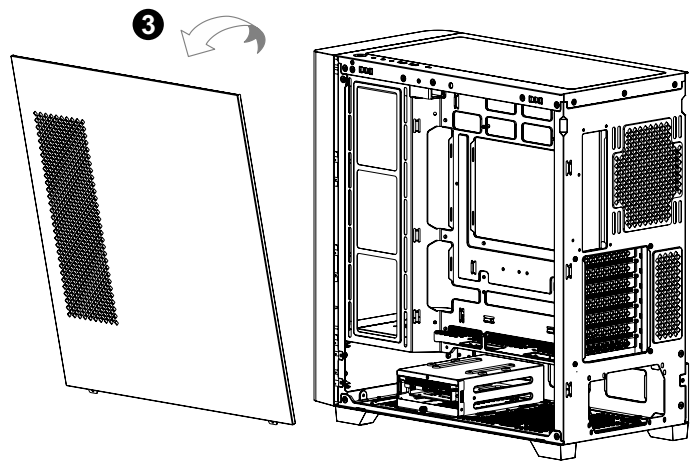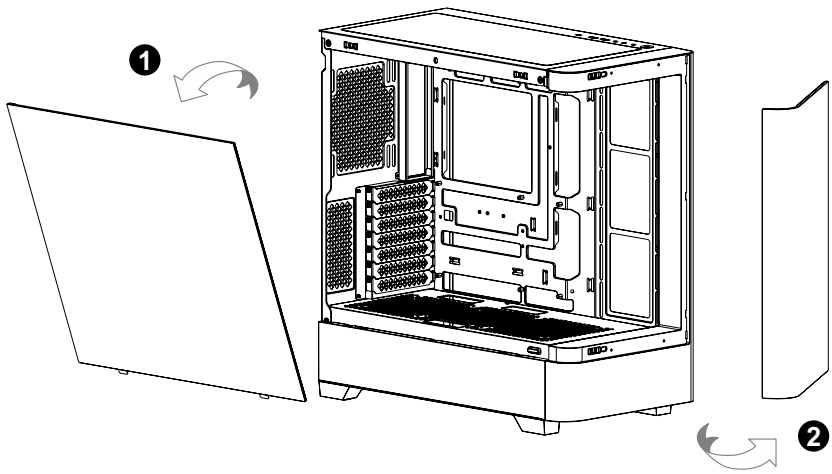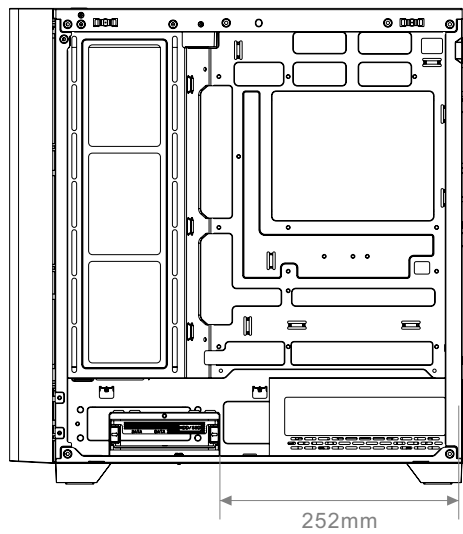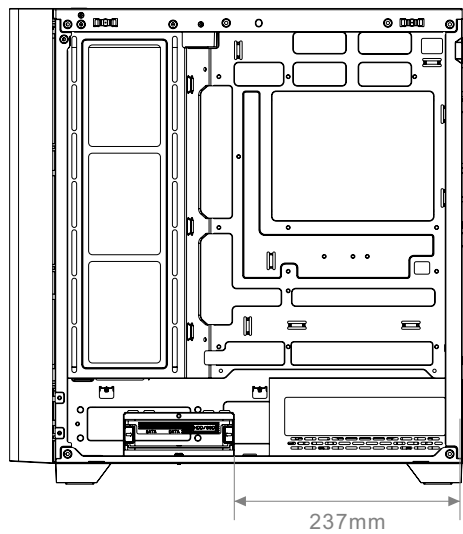

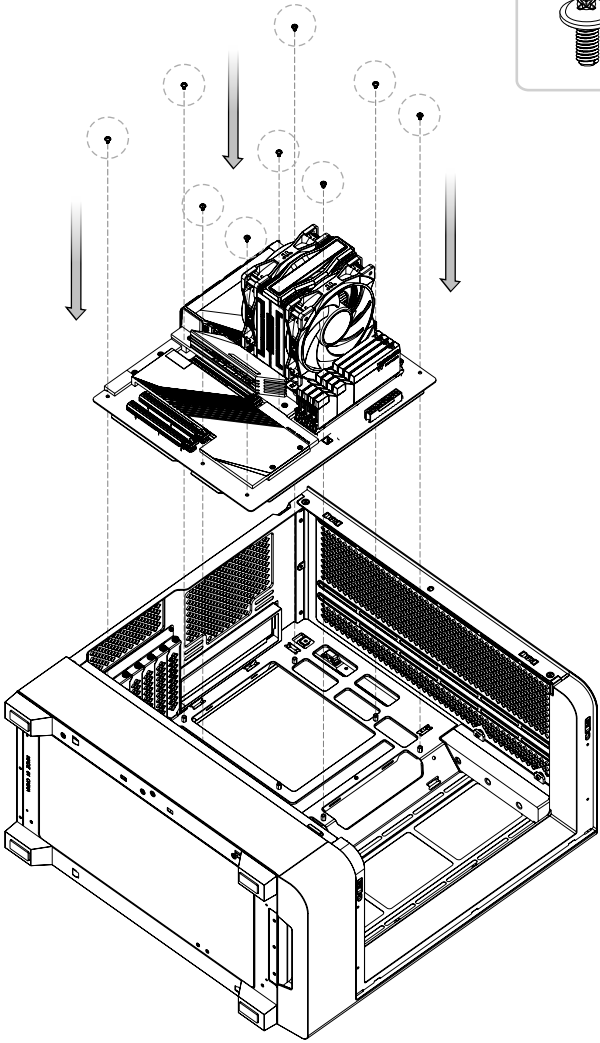
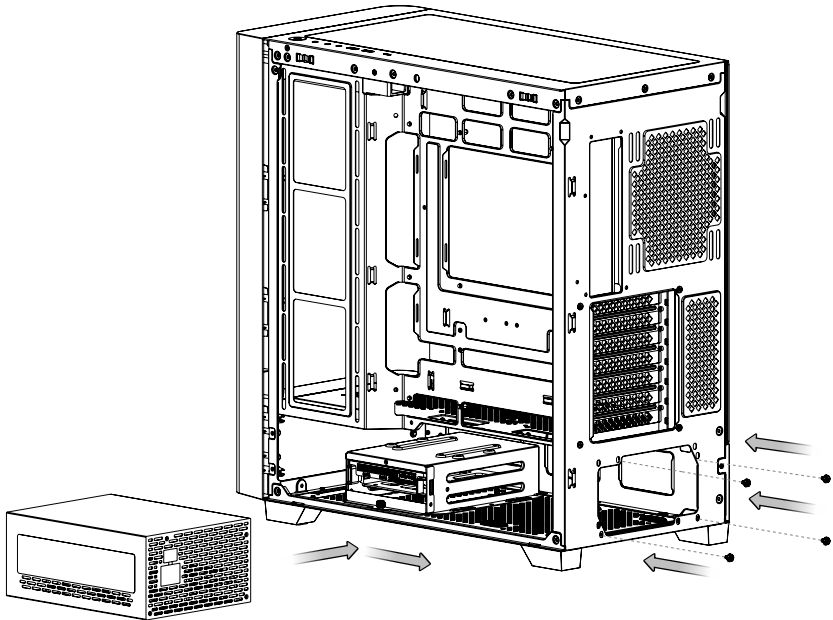



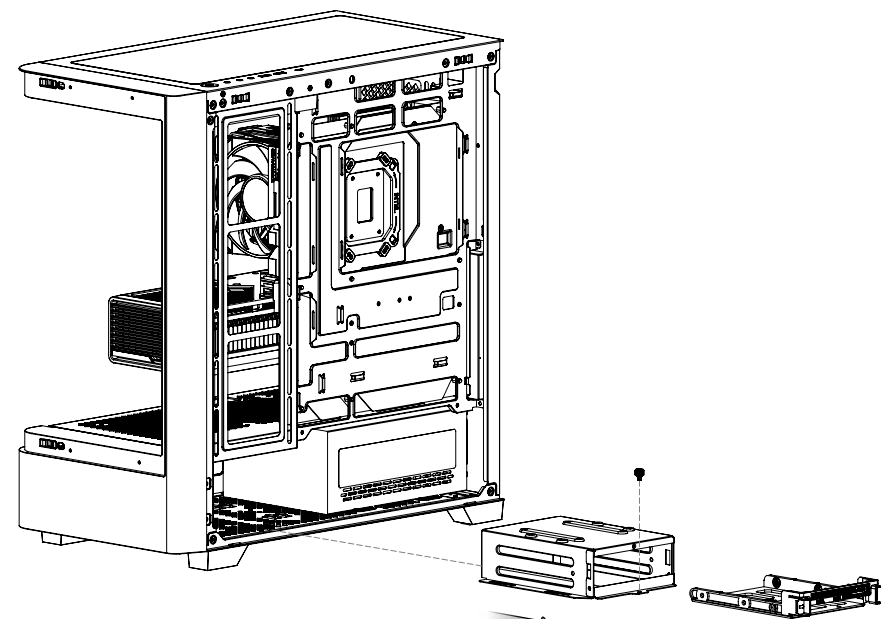


3.5" HDD

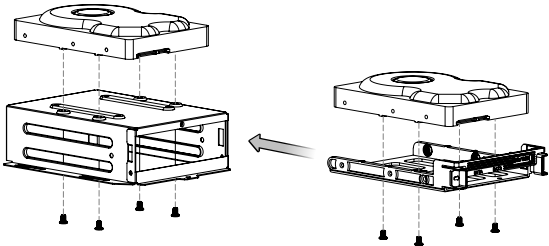

SSD/2.5" HDD

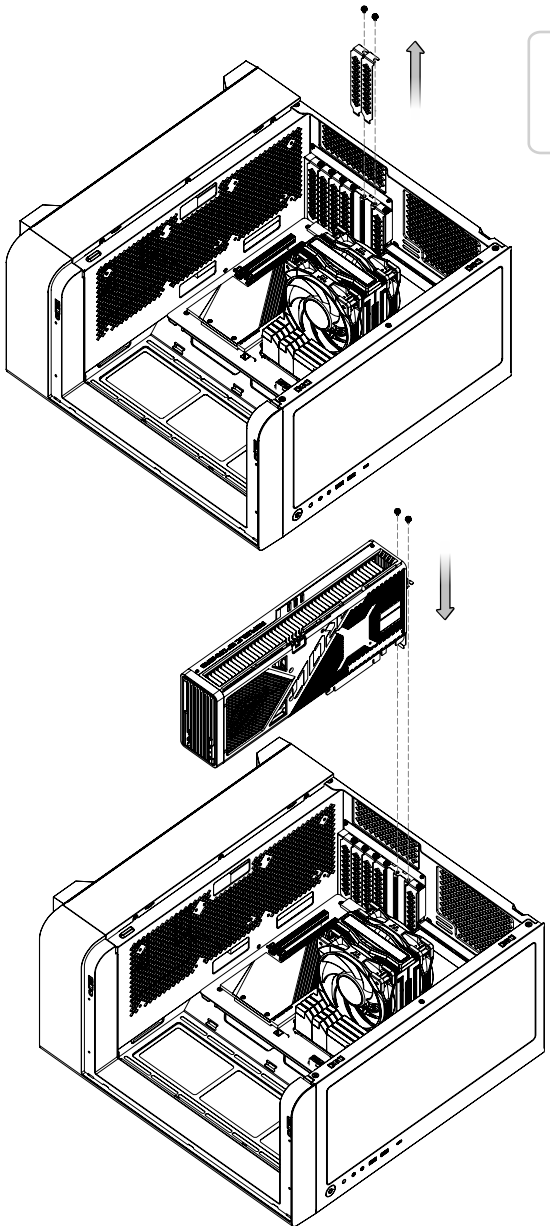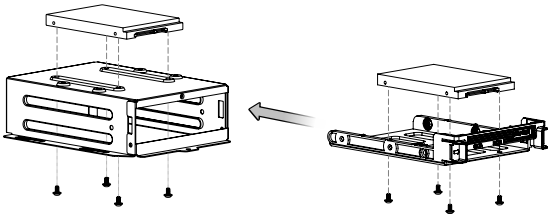

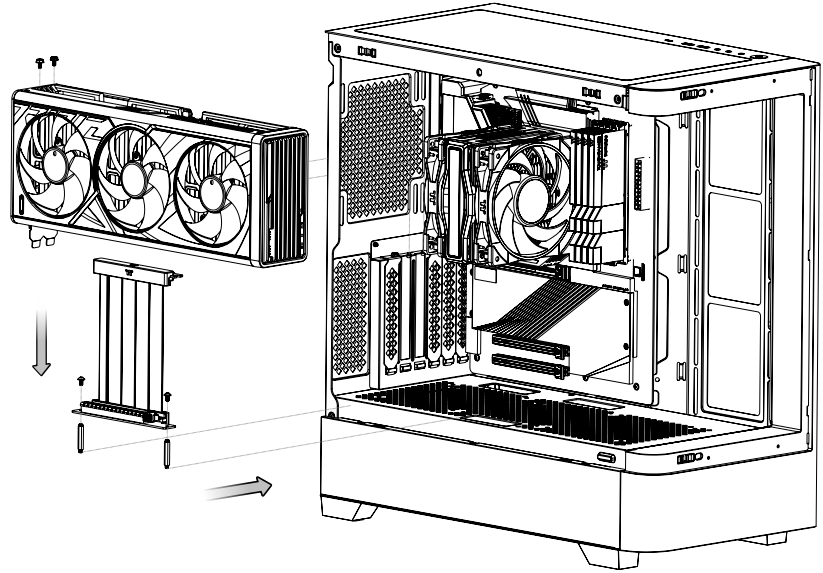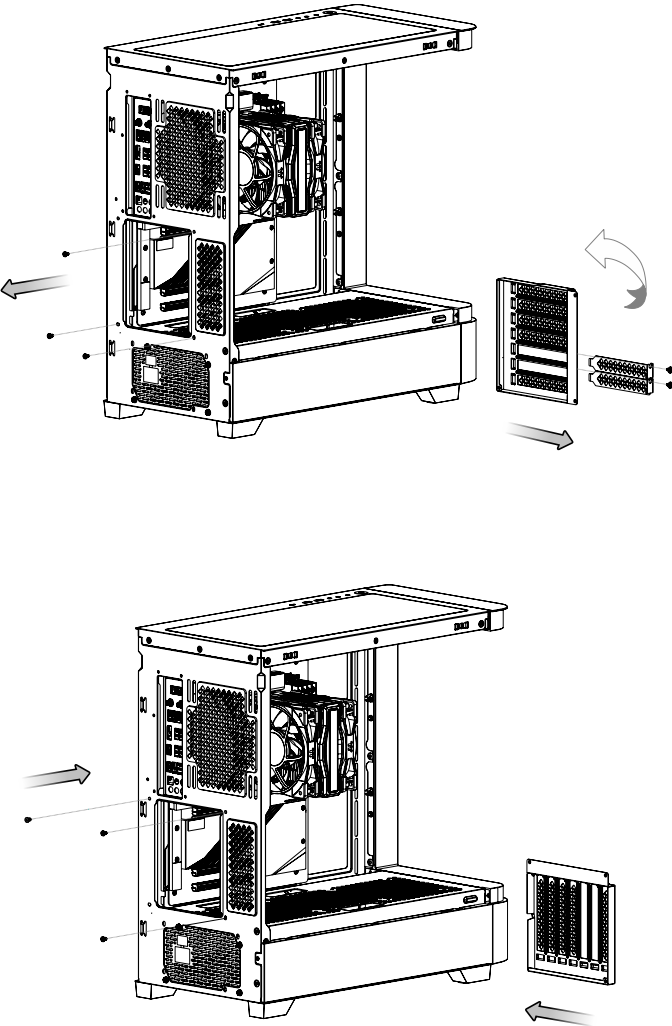

Top

140mm x 2
or
120mm x 3

Rear

140mm x 1
or
120mm x 1

M/B Side

120mm x 2

Top



360mm x 1
or
240mm x 1

M/B Side


240mm x 1

Power Cover


120mm x 3

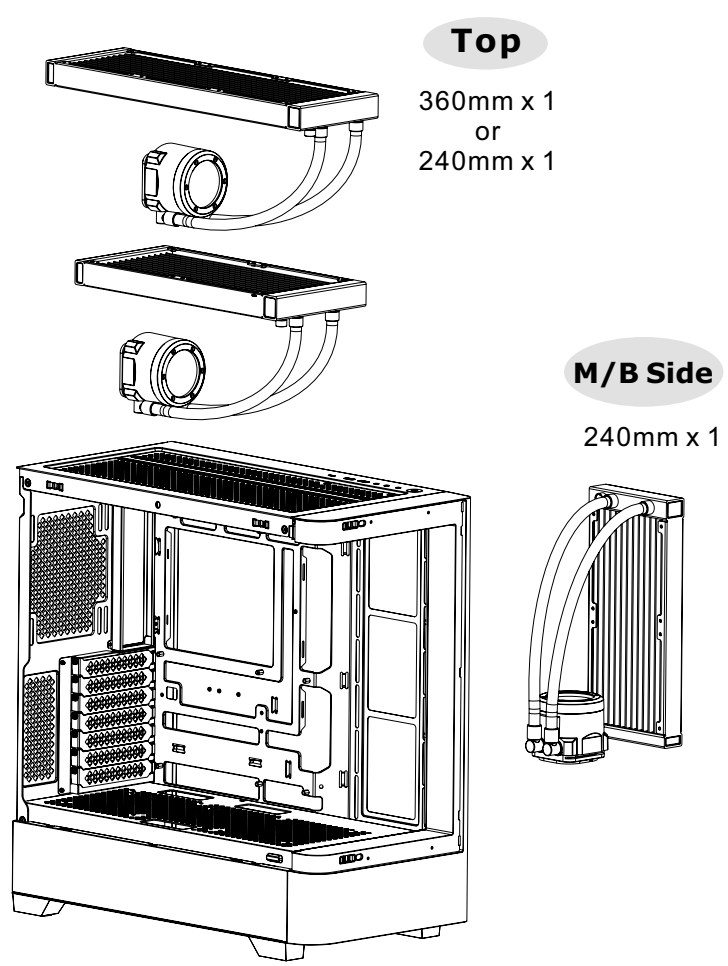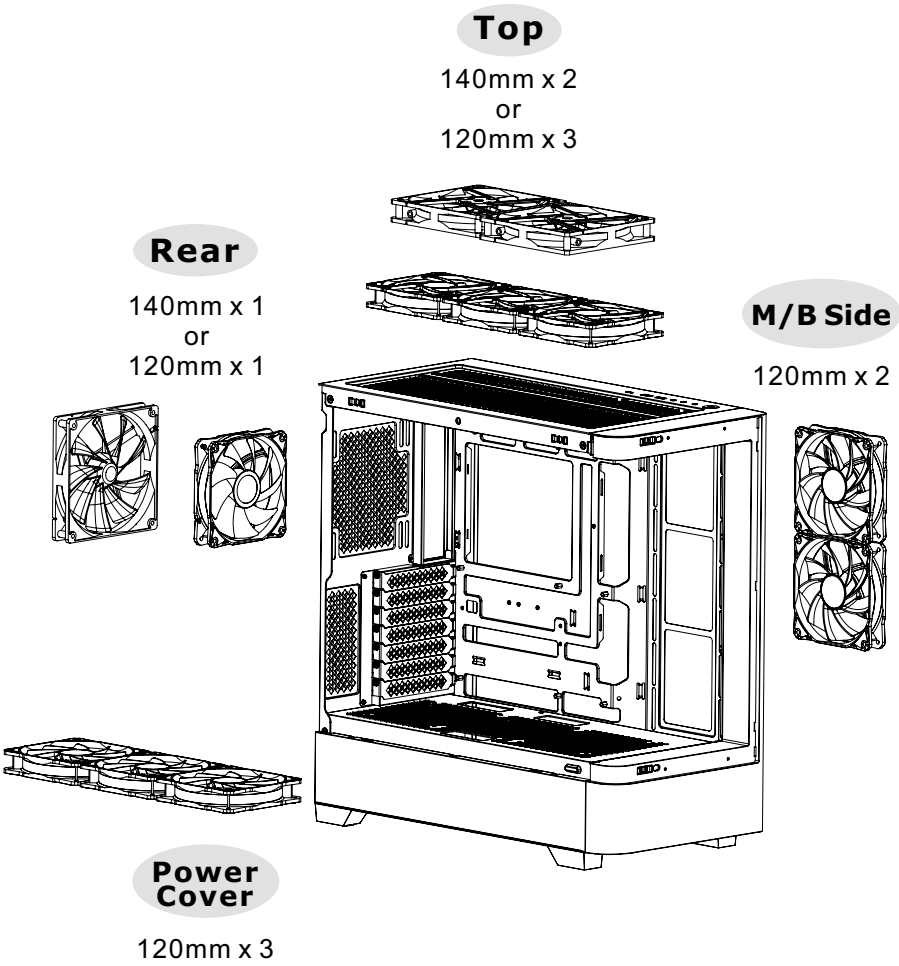

I/O Port

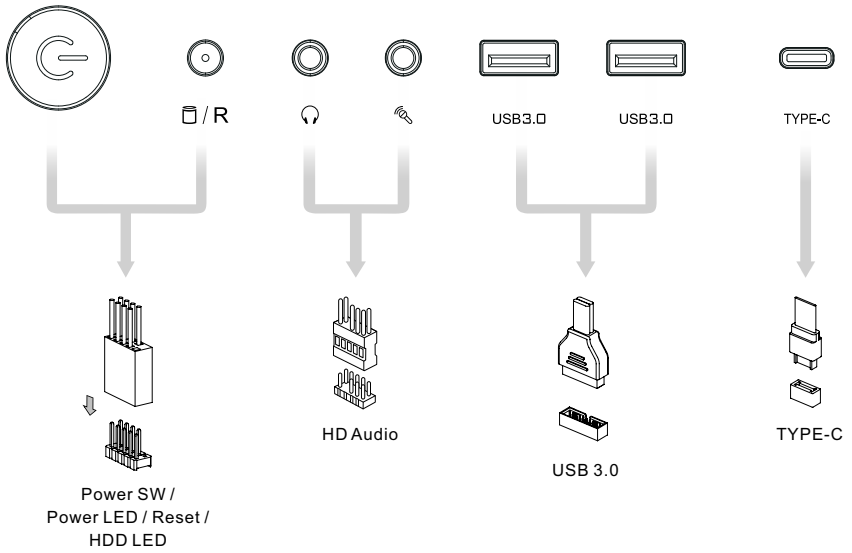


Motherboard Header Diagram

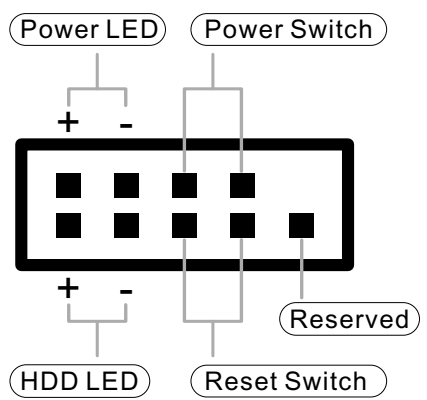

Top

Front

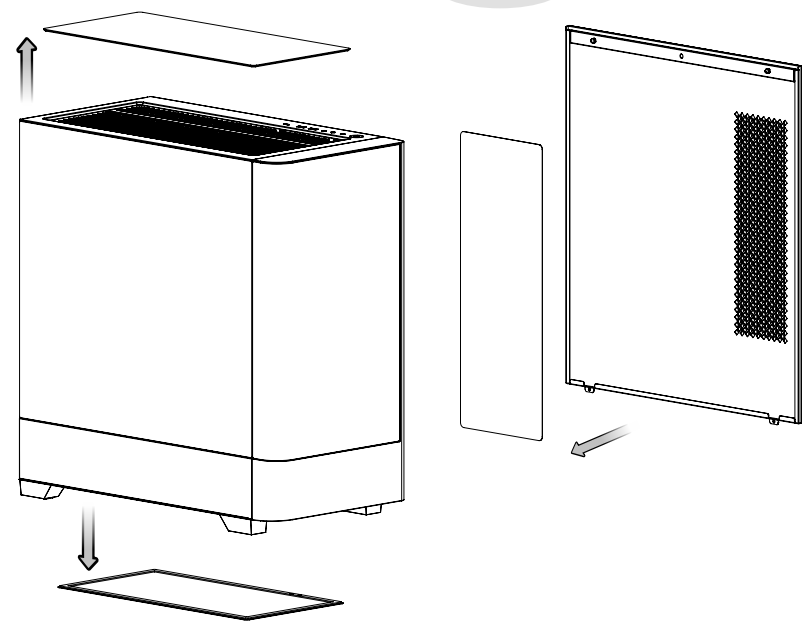

Bottom