




View 370 TG ARGB

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช

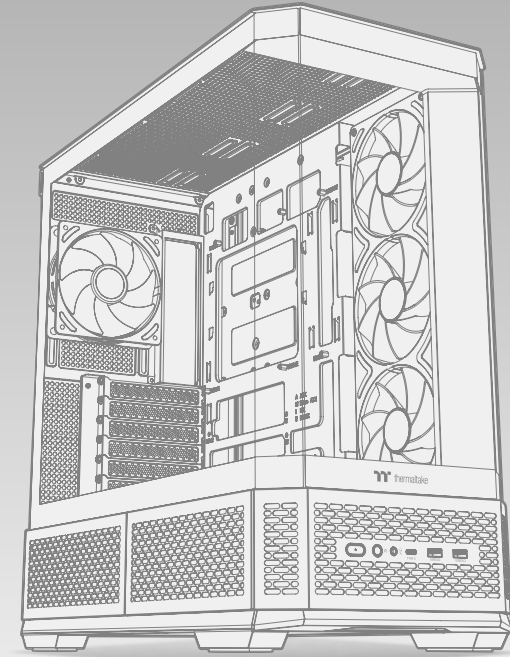

© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.10
All other registered trademarks belong to their respective companies. www.thermaltake.com



TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://ttpremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermaltake.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermaltake.com/>

Global Facebook
<https://www.facebook.com/ThermaltakeInc>

Taiwan Facebook
<http://www.facebook.com/ThermaltakeTW>

Global community forums
<http://community.thermaltake.com>

CONTENTS




Chapter 1. Product Introduction

1.0	Specification	01
1.1	Accessory	02
1.2	Warning and Notice	03


Chapter 2. Installation Guide

2.0	Remove Panels	06
2.1	Power Supply Unit (PSU) Installation	07
2.2	Motherboard Installation	08
2.3	3.5" & 2.5" HDD Installation	09
2.4	VGA Card Installation	11
2.5	6" LCD Installation	14
2.6	Air Cooling Installation	15
2.7	AIO Liquid Cooling Installation	16
2.8	I/O Connection	17
2.9	Remove Filters	18
2.10	ARGB Control Instruction	19


Case Type	Mid Tower		
Dimension (H*W*D)	492.5 x 235 x 478.8 mm (19.39 x 9.25 x 18.85 inch)		
Panel	Tempered Glass x 4		
Material	SPCC		
Cooling System	M/B Side(intake): 360 x 120 x 25 mm SF360 ARGB PWM Reverse Fan (500~1800rpm, 36.4 dBA) x 1 Rear(exhaust): 120 x 120 x 25 mm SF120 ARGB PWM Fan (500~1800rpm, 29.3 dBA) x 1		
Drive Bays	1 x 3.5" + 1 x 2.5" or 2 x 2.5"		
Expansion Slots	7 (Rotatable Patented Design)		
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)		
I/O Port	USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1		
Fan Support	Top	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm
	Right (M/B Side)	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	1 x 120 mm
	Rear	1 x 120 mm	
	Power Cover	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	
Radiator Support	Top	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	
	Right (M/B Side)	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	1 x 120 mm
	Rear	1 x 120 mm	
Clearances	CPU cooler max height	165 mm	
	VGA max length	420 mm	
	PSU max length	279 mm (PSU suggested length: 200mm)	

Figure	Parts Name	Q'ty	Used for
	Stand #6-32 x 6mm	4	Power Supply
	Screw M3 x 5mm	25	Motherboard / 2.5" HDD / SSD / Riser Cable
	Screw #6-32 x 6mm	8	3.5" HDD
	Stand-off 6.5mm	4	Backup
	Net setter	1	Motherboard Stand-off Installation
	Screw #6-32 x 28mm	12	Fan
	Stand-off 26mm	2	Riser Cable
	Buzzer	1	Motherboard Alarm
	Panel Clip	2	Backup
	Cable Ties 150mm	10	Cable Management
	Velcro - 1 meter	1	Cable Management


Chassis dimension

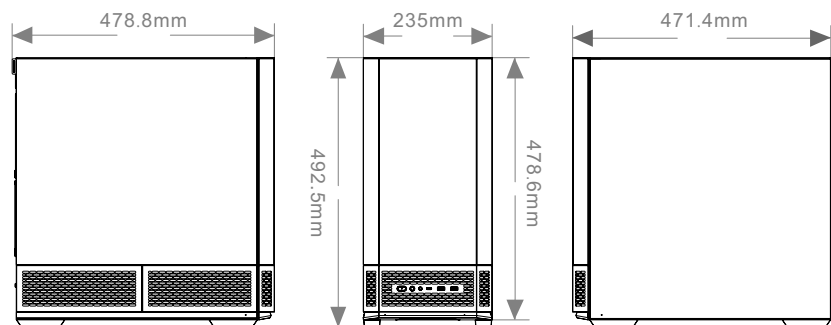


Motherboard Compatibility: ITX / mATX / ATX

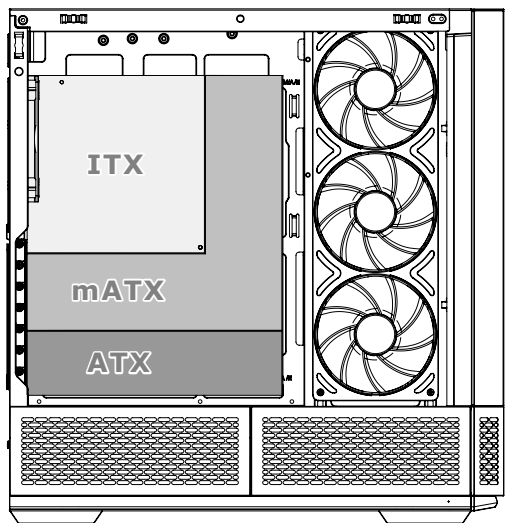

CPU cooler max height: 165mm


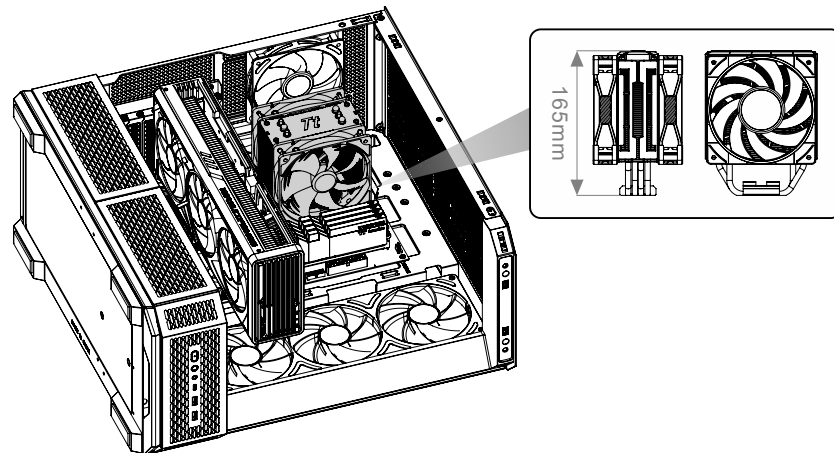





VGA max length: 420mm

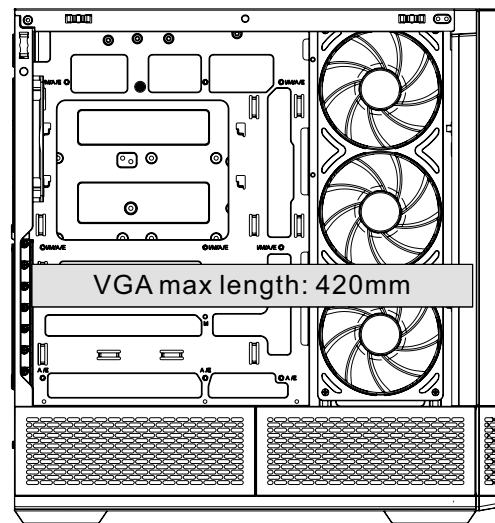


PSU max length: 275mm


PSU suggested length: 200mm

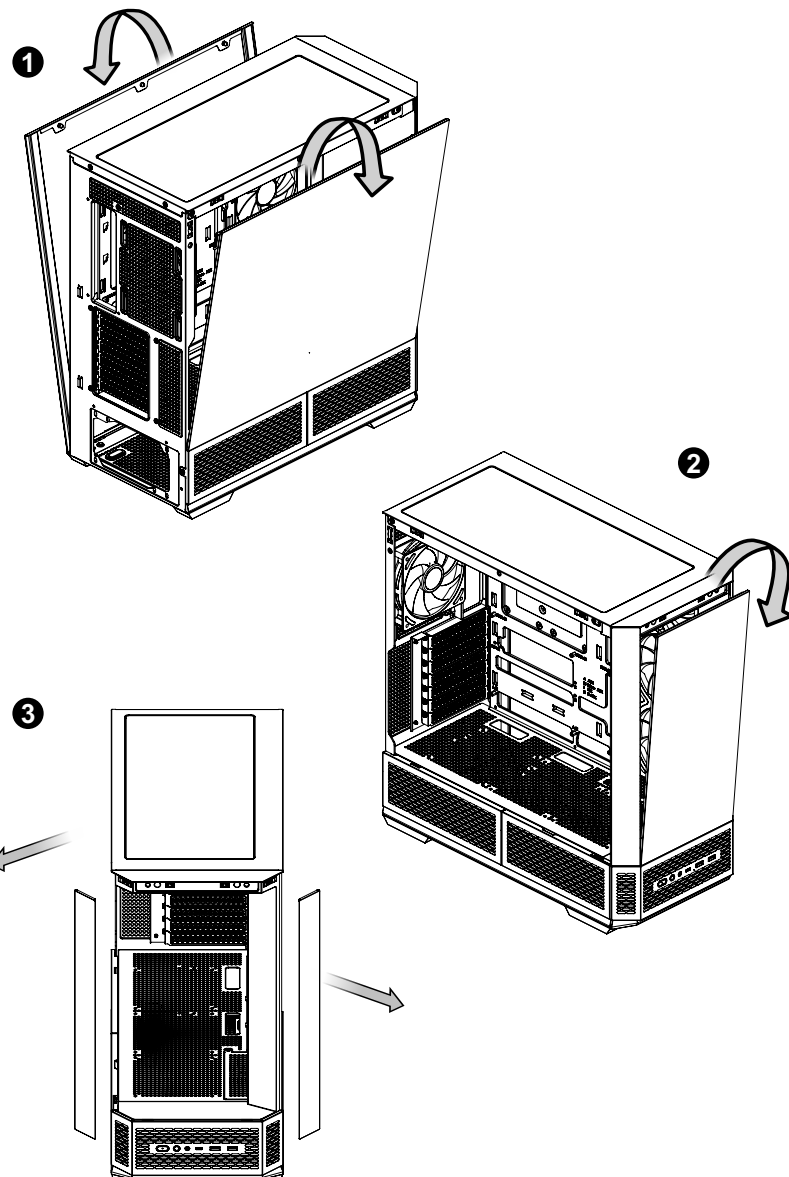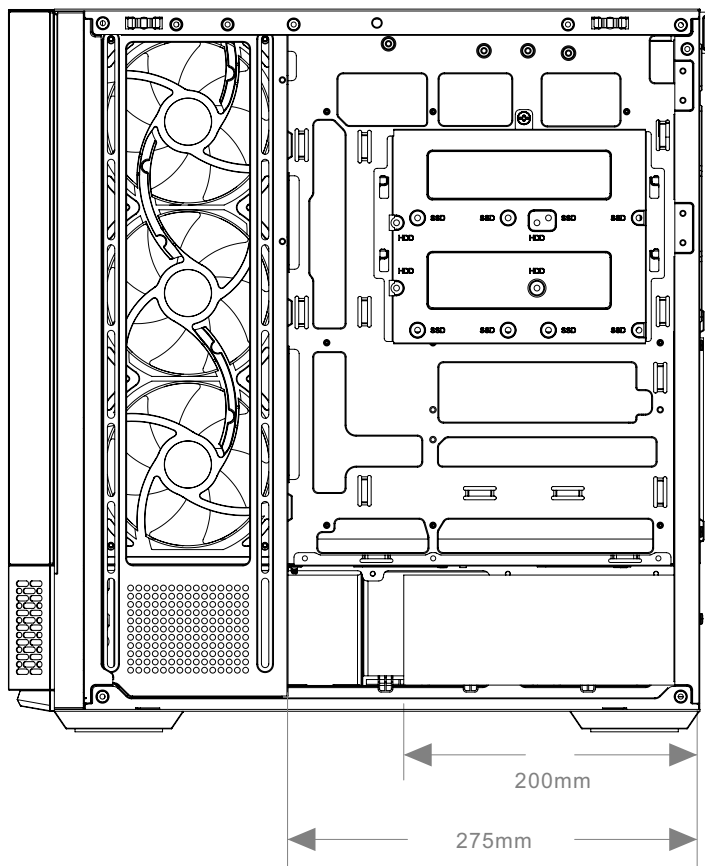

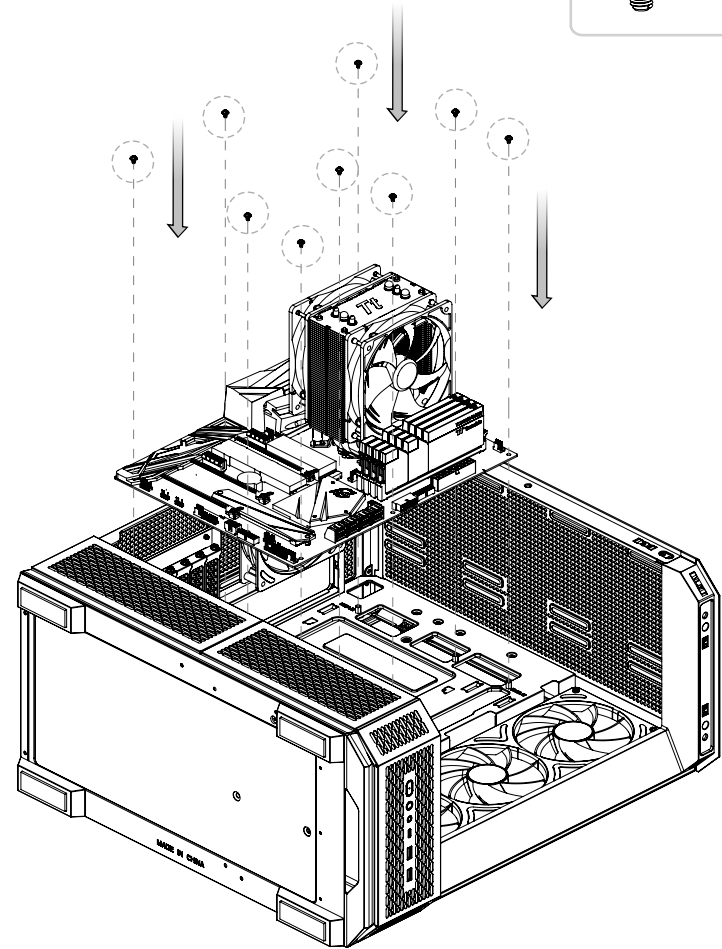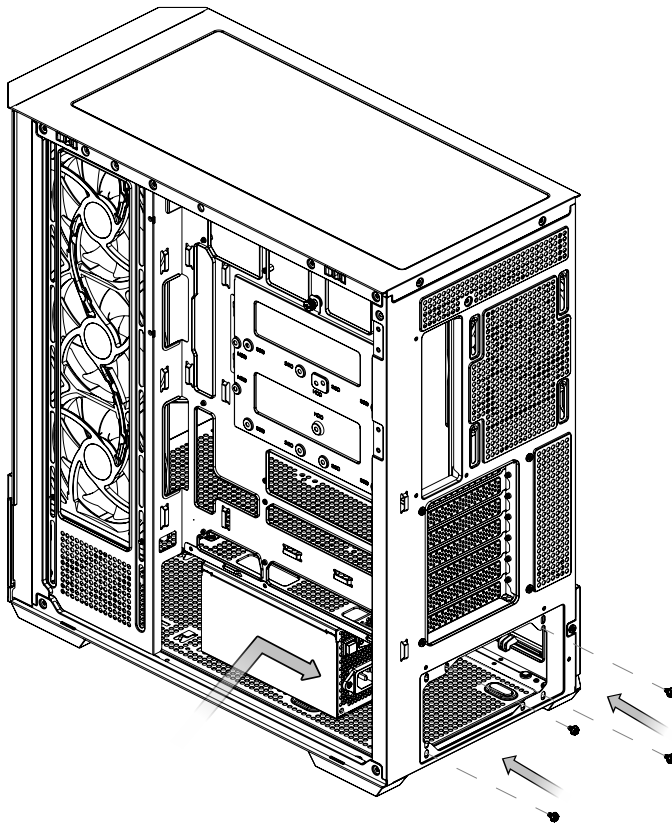



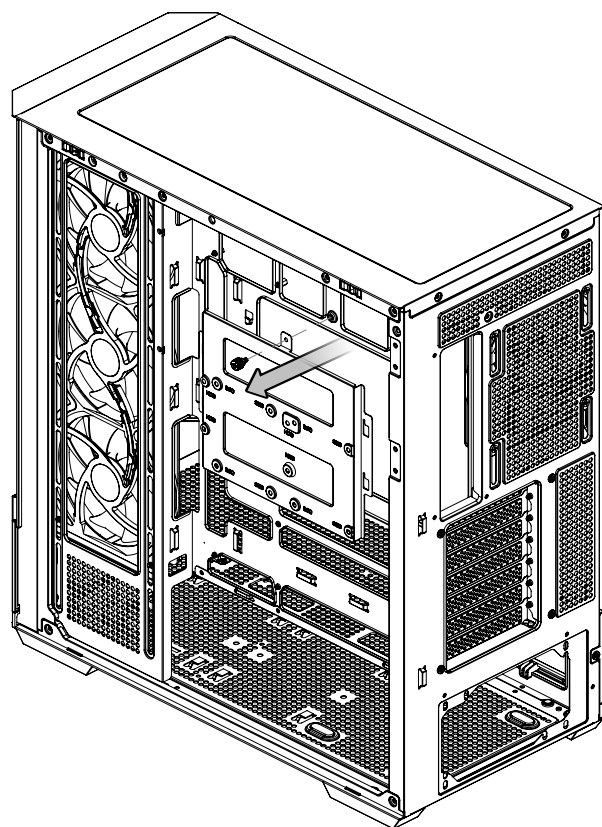




3.5" HDD


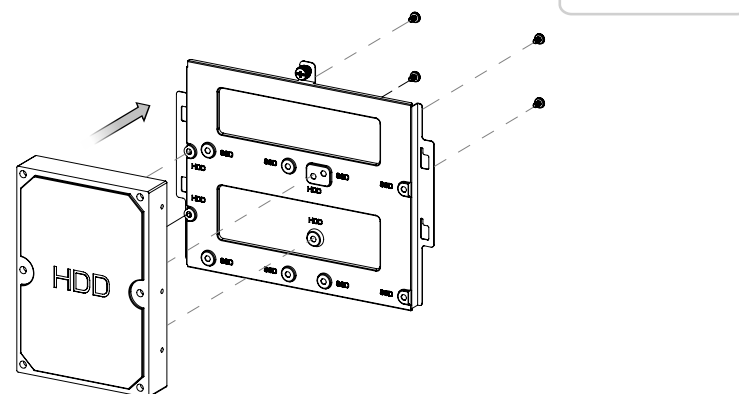


SSD/2.5" HDD

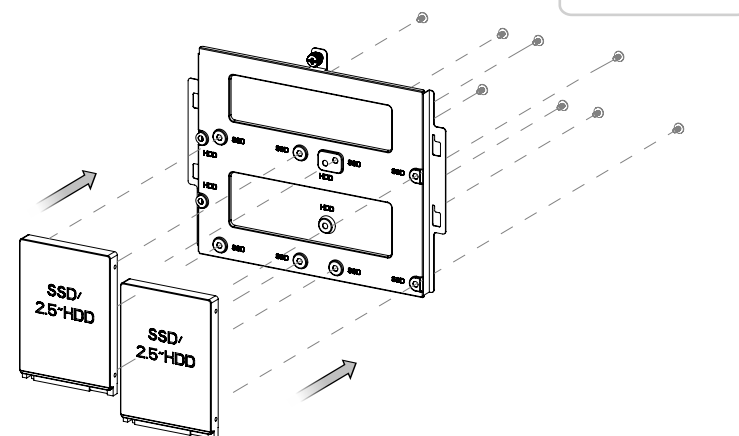


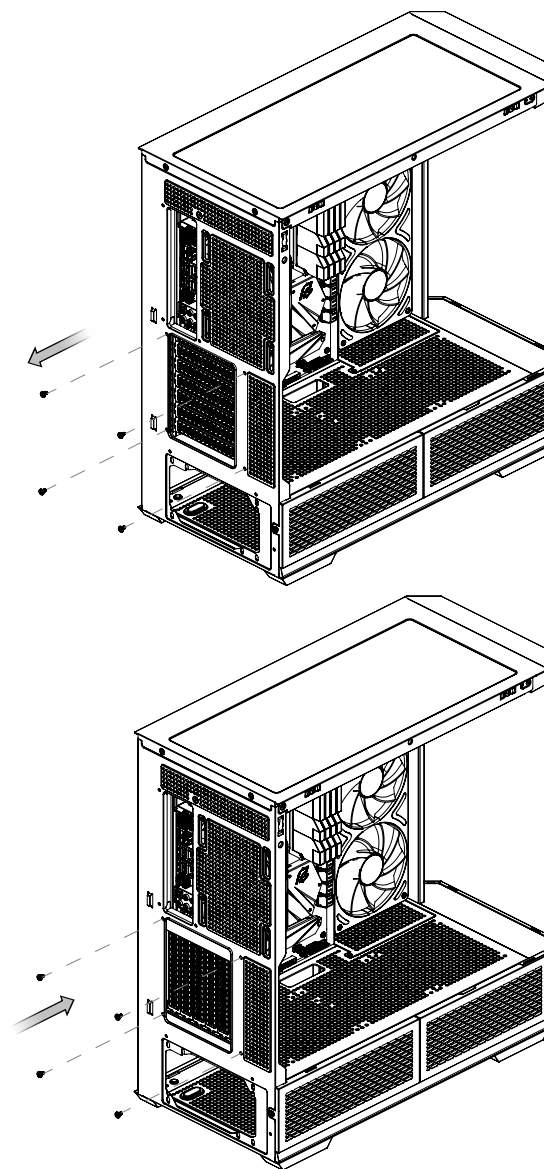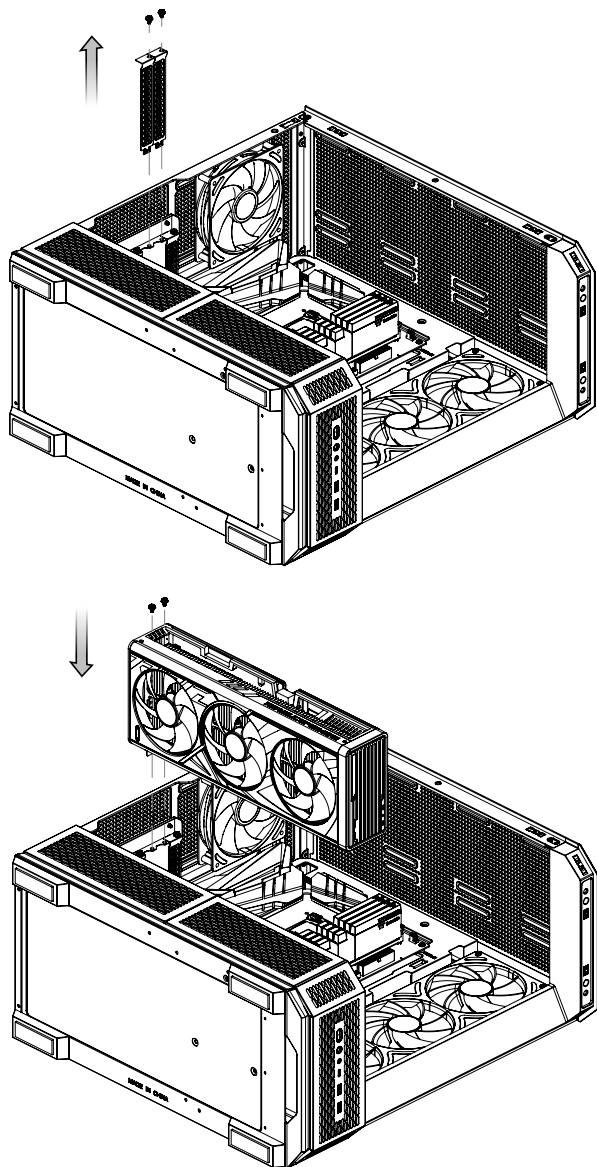

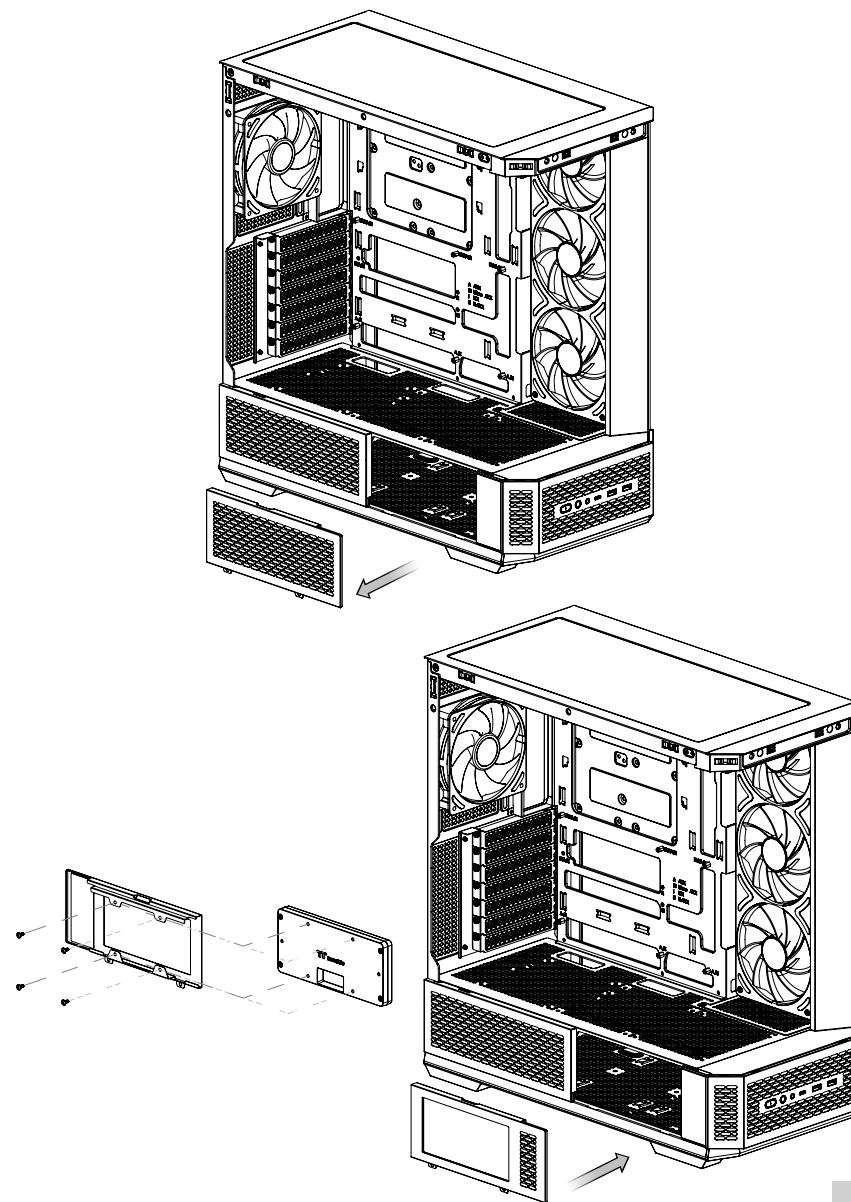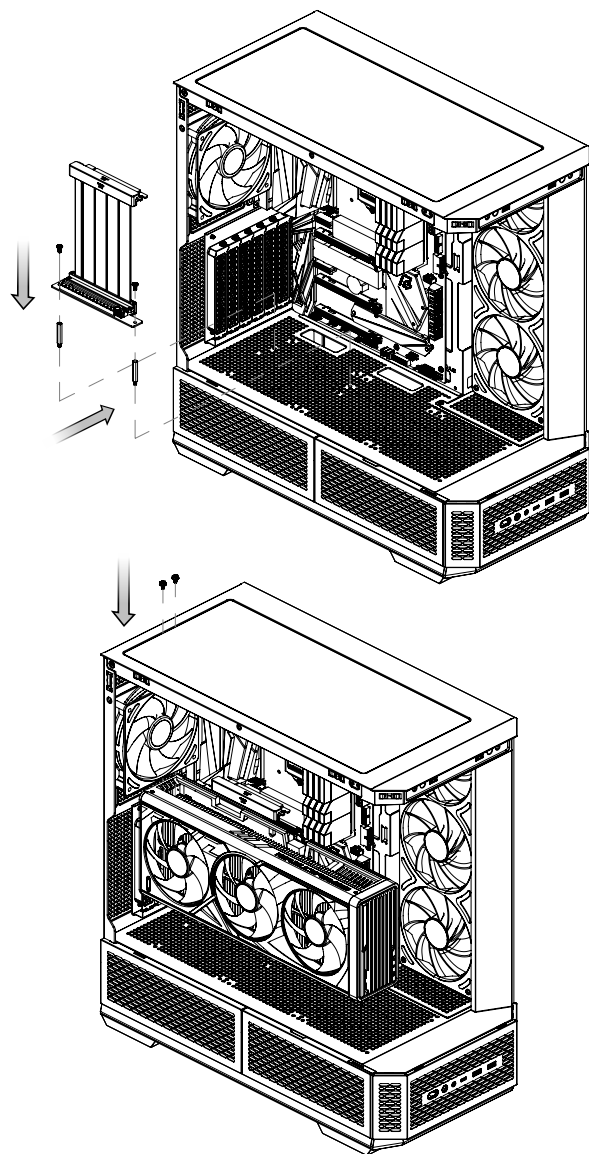


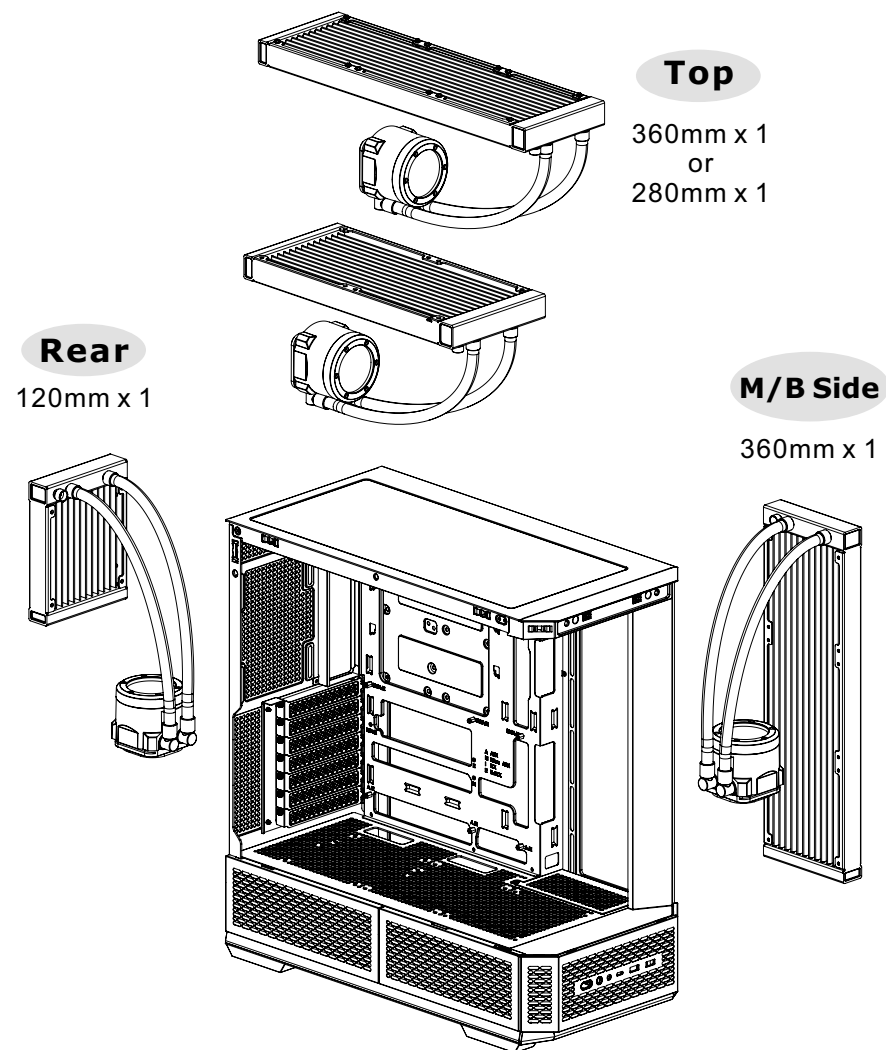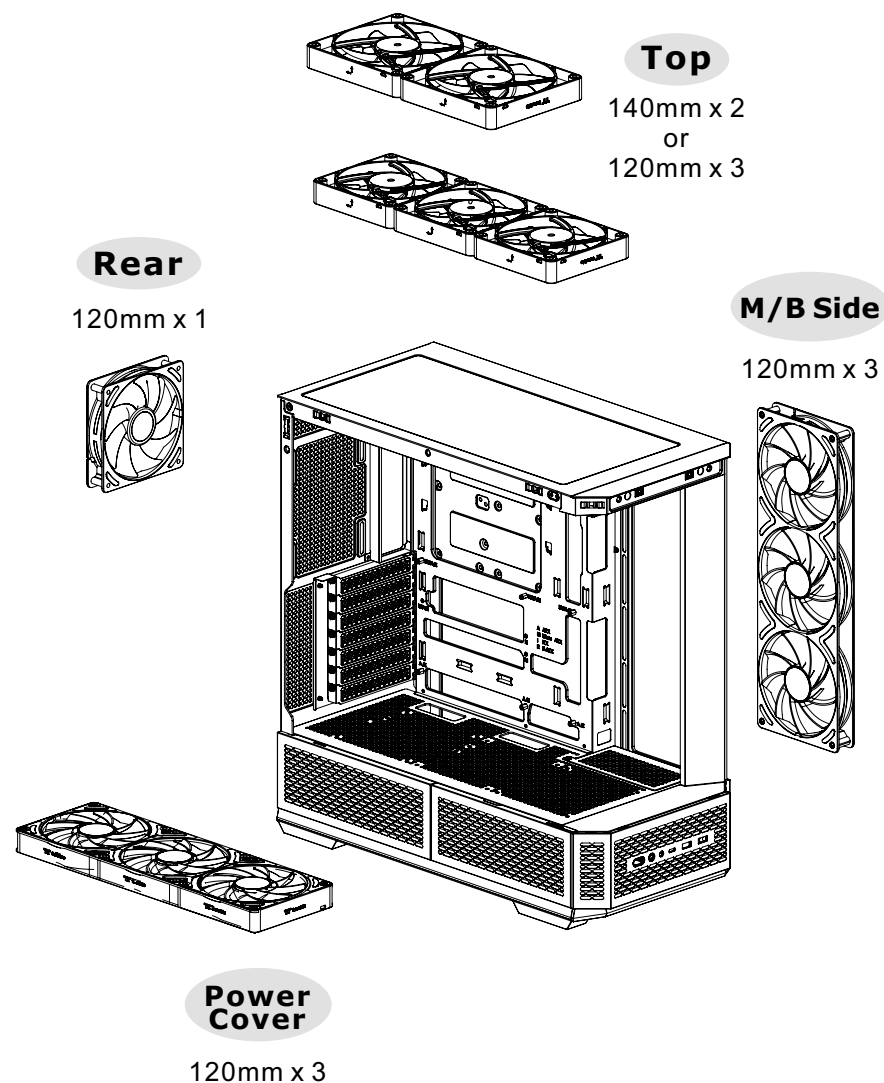


I/O Port

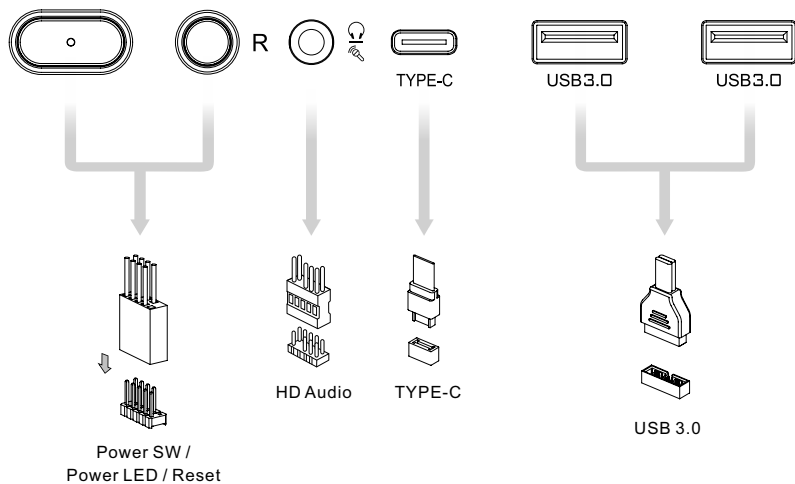


Motherboard Header Diagram

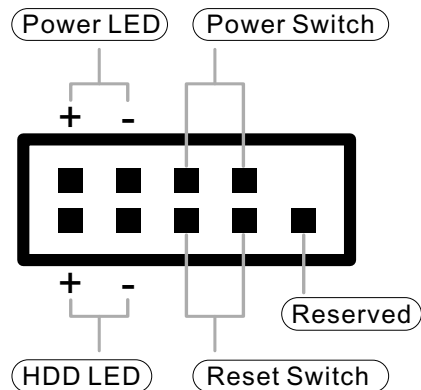

Top

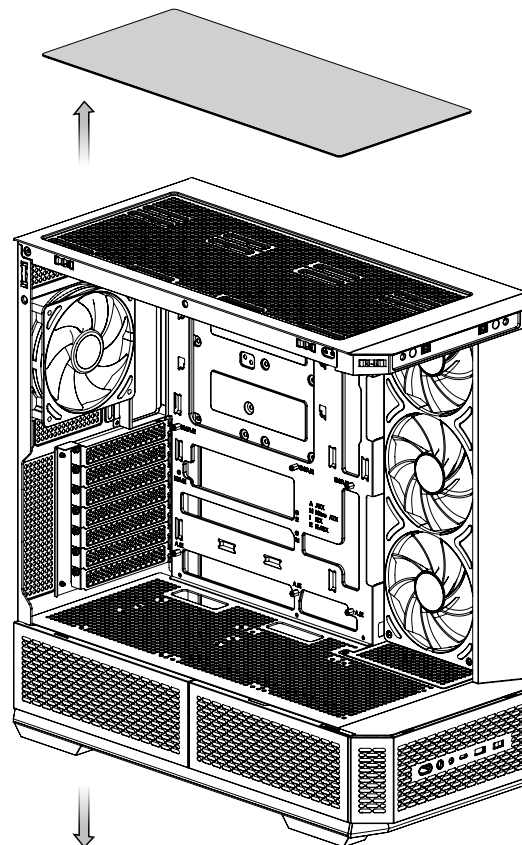


Bottom

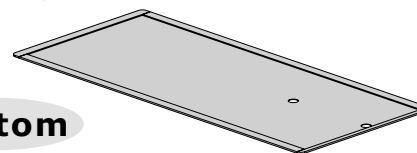

ARGB Control Instruction – How to connect MB


ASUS/ASRock/BIOSTAR

Aura Addressable Strip Header(s)



MSI

JRGB-strip Header(S)



GIGABYTE

AOURS RGB Fusion with Digital LEDs

