

View 390 Air

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช



© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.05
All other registered trademarks belong to their respective companies. www.thermaltake.com



TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://tppremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermaltake.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermaltake.com/>

Global Facebook
<https://www.facebook.com/ThermaltakeInc>

Taiwan Facebook
<http://www.facebook.com/ThermaltakeTW>

Global community forums
<http://community.thermaltake.com>

CONTENTS














Chapter 1. Product Introduction

| | | |
|-----|-----------------------------|----|
| 1.0 | Specification | 01 |
| 1.1 | Accessory | 02 |
| 1.2 | Dimension & Clearance | 03 |


Chapter 2. Installation Guide

| | | |
|-----|--|----|
| 2.0 | Remove Components | 06 |
| 2.1 | Power Supply Unit (PSU) Installation | 08 |
| 2.2 | Motherboard Installation | 09 |
| 2.3 | HDD Installation | 10 |
| 2.4 | VGA Card Installation | 11 |
| 2.5 | Air Cooling Installation | 14 |
| 2.6 | AIO Liquid Cooling Installation | 15 |
| 2.7 | 3.9" & 6" LCD Installation | 16 |
| 2.8 | I/O Connection | 17 |
| 2.9 | Remove Filters | 19 |


| | | |
|------------------------------|--|--|
| Case Type | Mid Tower | |
| Dimension (H*W*D) | 503 x 287 x 485 mm (19.80 x 11.30 x 19.1 inch) | |
| Panel | Tempered Glass x 1 | |
| Material | SPCC | |
| Cooling System | Rear (exhaust): 120 x 120 x 25 mm CT120 fan (500 ~ 2000 rpm, 25.8 dBA) x 2 | |
| Drive Bays | 2 x 3.5", 1 x 2.5" or 3 x 2.5" | |
| Expansion Slots | 7 (Rotatable Patented Design) | |
| Motherboards | 6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) | |
| Hidden-Connector Motherboard | 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) | |
| I/O Port | USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1 | |
| PSU | Standard PS2 PSU (optional) | |
| Fan Support | Front | 3 x 120 mm, 2 x 140 mm, 2 x 200 mm |
| | Right | 3 x 120 mm |
| | Rear | 2 x 120 mm |
| | Bottom | 3 x 120 mm |
| Radiator Support | Front (AIO) | 1 x 360 mm, 1 x 240 mm, 1 x 120 mm 1 x 280 mm, 1 x 140 mm |
| | Right (AIO) | 1 x 360 mm, 1 x 240 mm, 1 x 120 mm |
| Clearances | CPU cooler height limitation | 160 mm |
| | VGA length limitation | 390 mm (with Radiator) 420 mm (without Radiator) |
| | PSU length limitation | 200 mm (with 2.5" SSD) 260 mm (without 2.5" SSD) |

| Figure | Parts Name | Q'ty | Used for |
|---|-------------------------|------|--|
|  | Stand-off #6-32 x 6.5mm | 5 | Motherboard / VGA Riser Cable |
|  | Screw #6-32 x 6mm | 6 | Power Supply |
|  | Screw #6-32 x 5mm | 10 | 3.5" HDD |
|  | Screw #6-32 x 3.8mm | 2 | Rotatable PCIe Panel |
|  | Screw M3 x 5mm | 23 | Motherboard / 2.5" SSD / HDD / VGA Riser Cable |
|  | Screw T5 x 10mm | 8 | Case Fan |
|  | Screw #6-32 x 5mm | 3 | Front Panel & HDD Plate |
|  | Screw #6-32 x 34mm | 8 | 200mm Case Fan |
|  | Zip Ties | 10 | Cable Management |
|  | Buzzer | 1 | Motherboard Alarm |
|  | Nut Setter | 1 | Motherboard Stand-off Installation |
|  | Side Plate Clip | 5 | Side Panel |
|  | Velcro-1 meter | 1 | Cable Management |


Chassis dimension

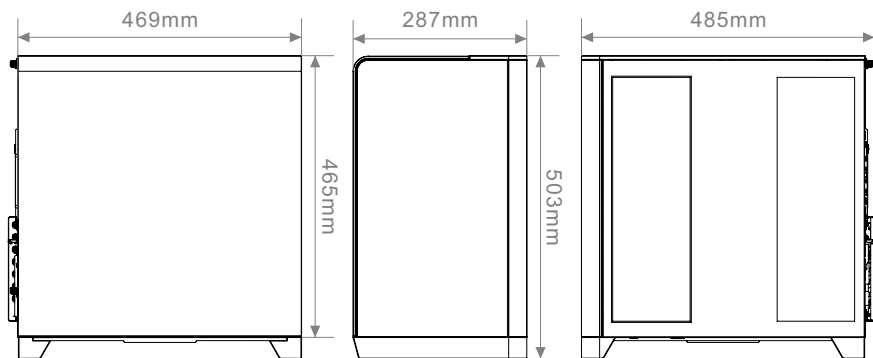


Motherboard Compatibility: ITX / mATX / ATX

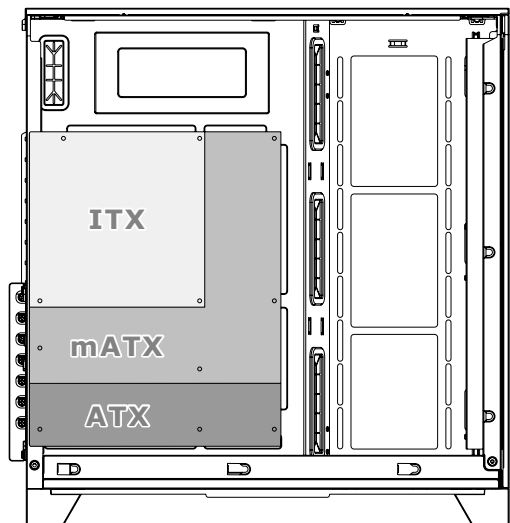



CPU cooler max height: 160mm


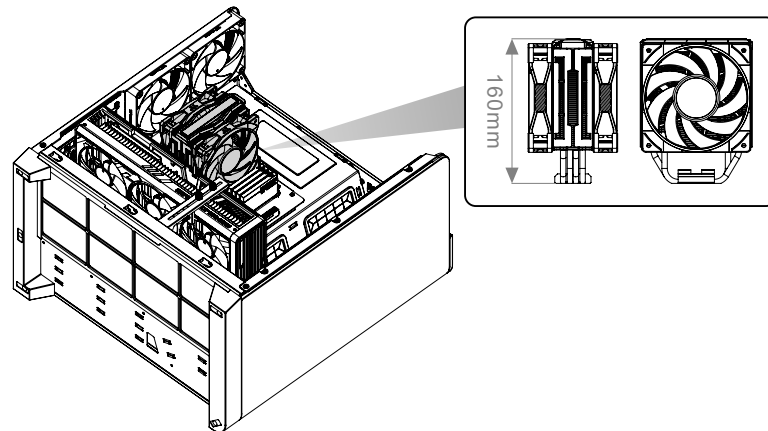



VGA max length: 390mm (with Radiator)
 VGA max length: 420mm (without Radiator)

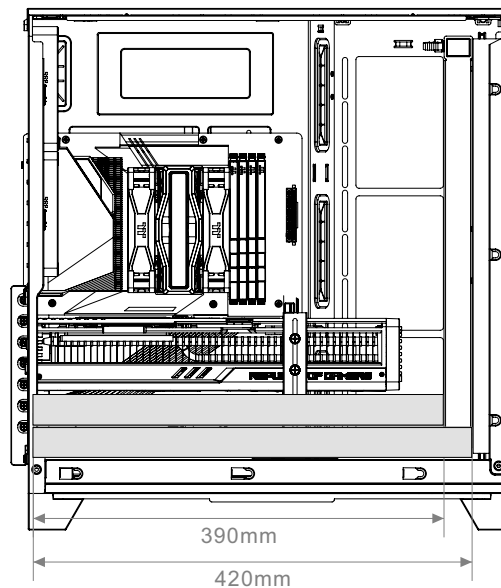


PSU length max length: 200mm (with 2.5" SSD)
PSU length max length: 260mm (without 2.5" SSD)

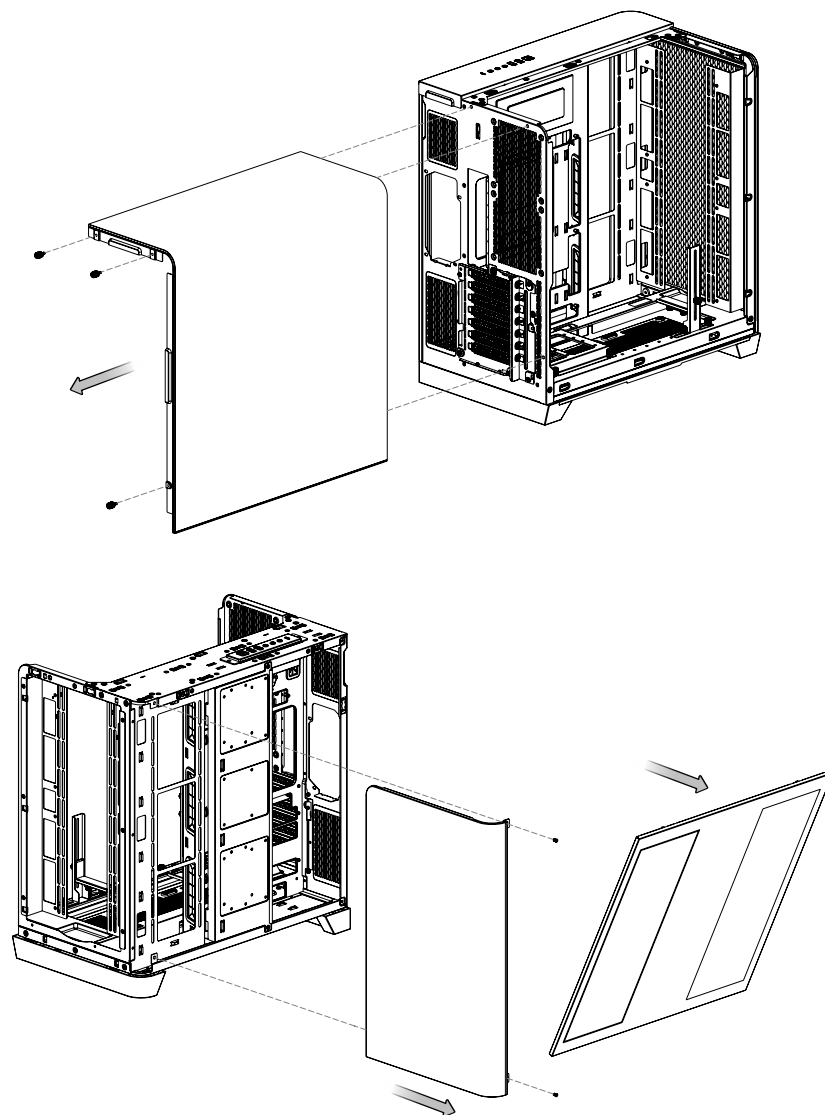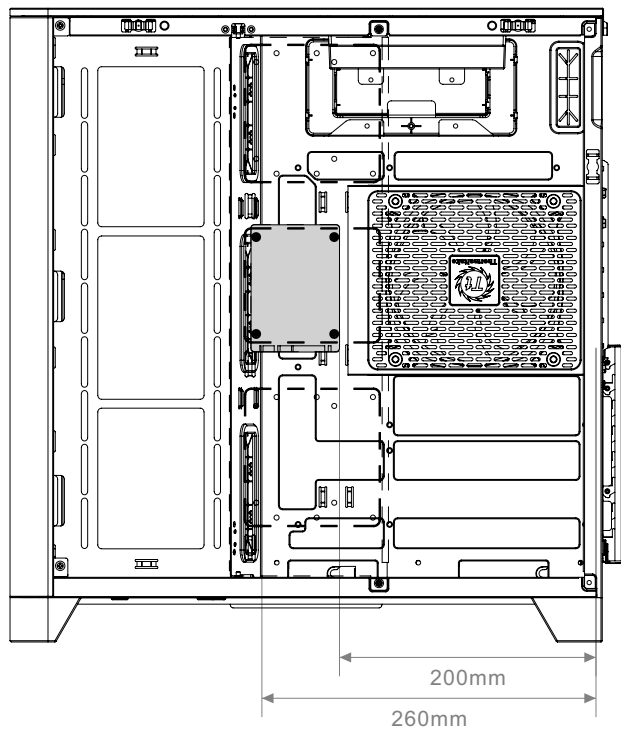

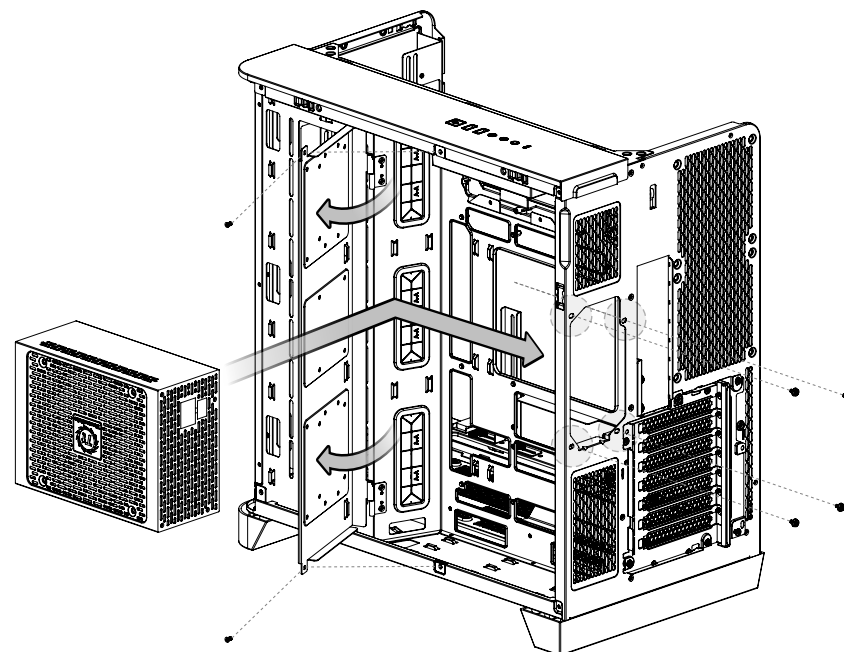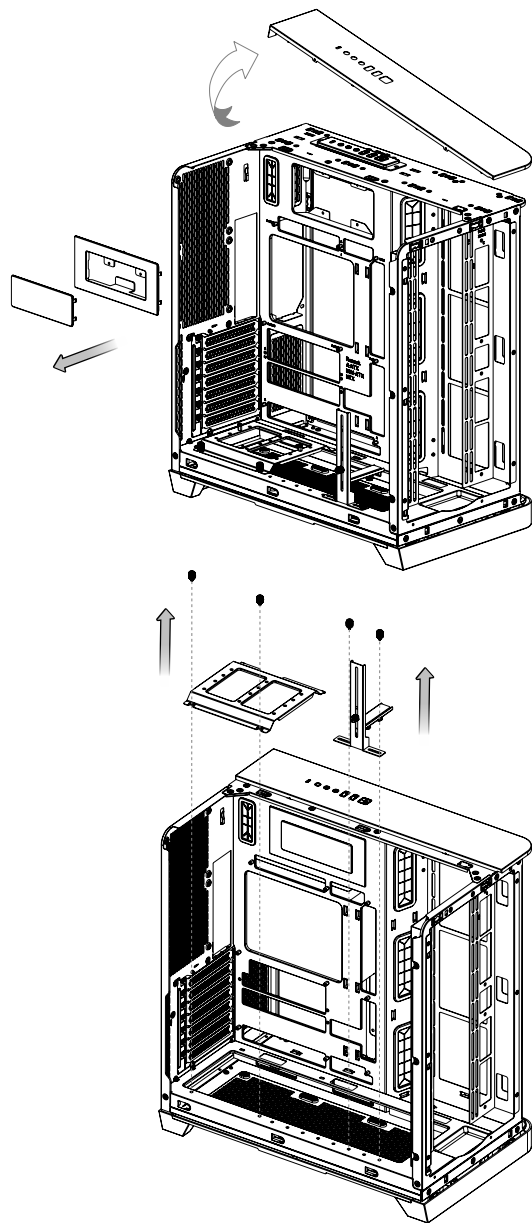



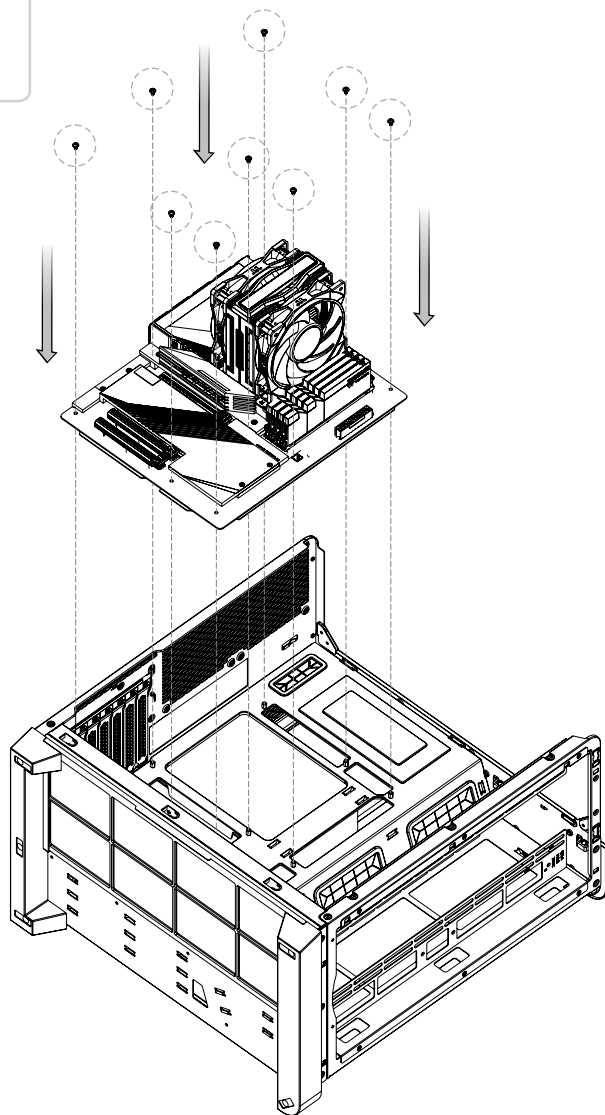



3.5" HDD

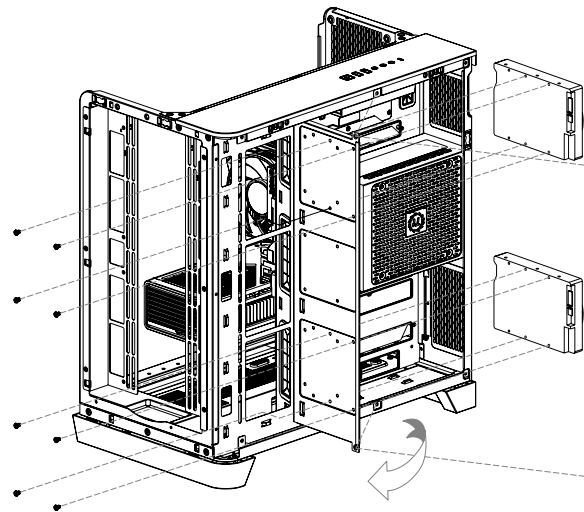

2.5" SSD / HDD

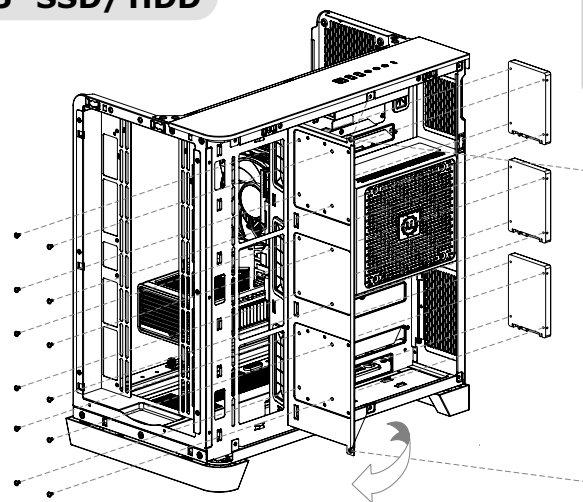

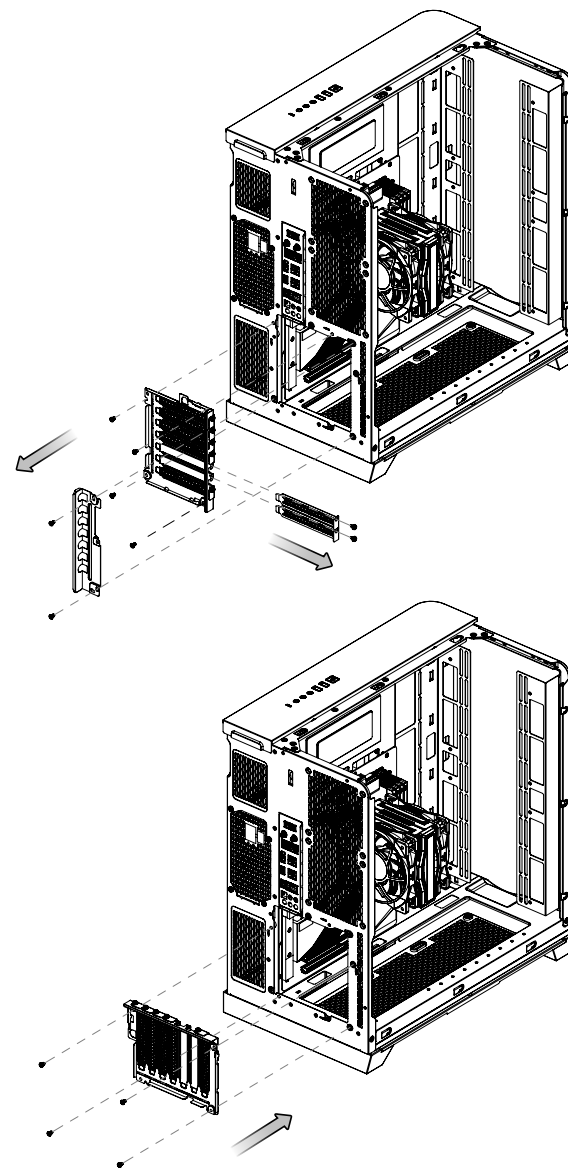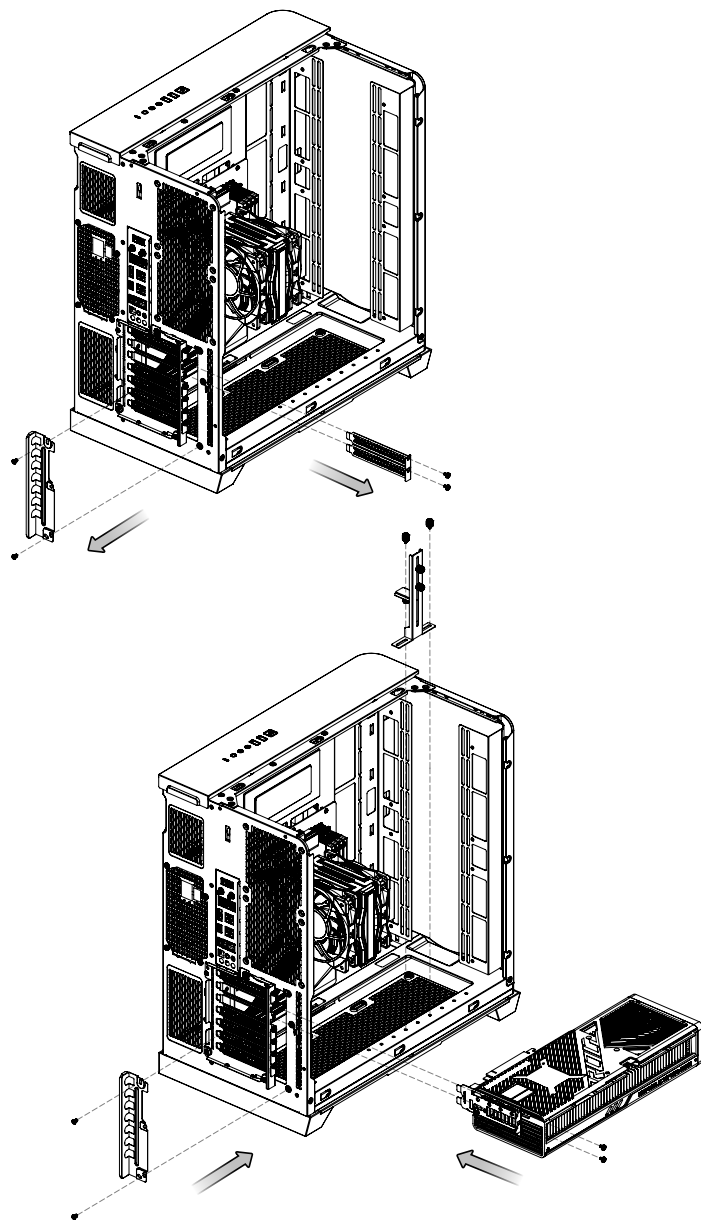

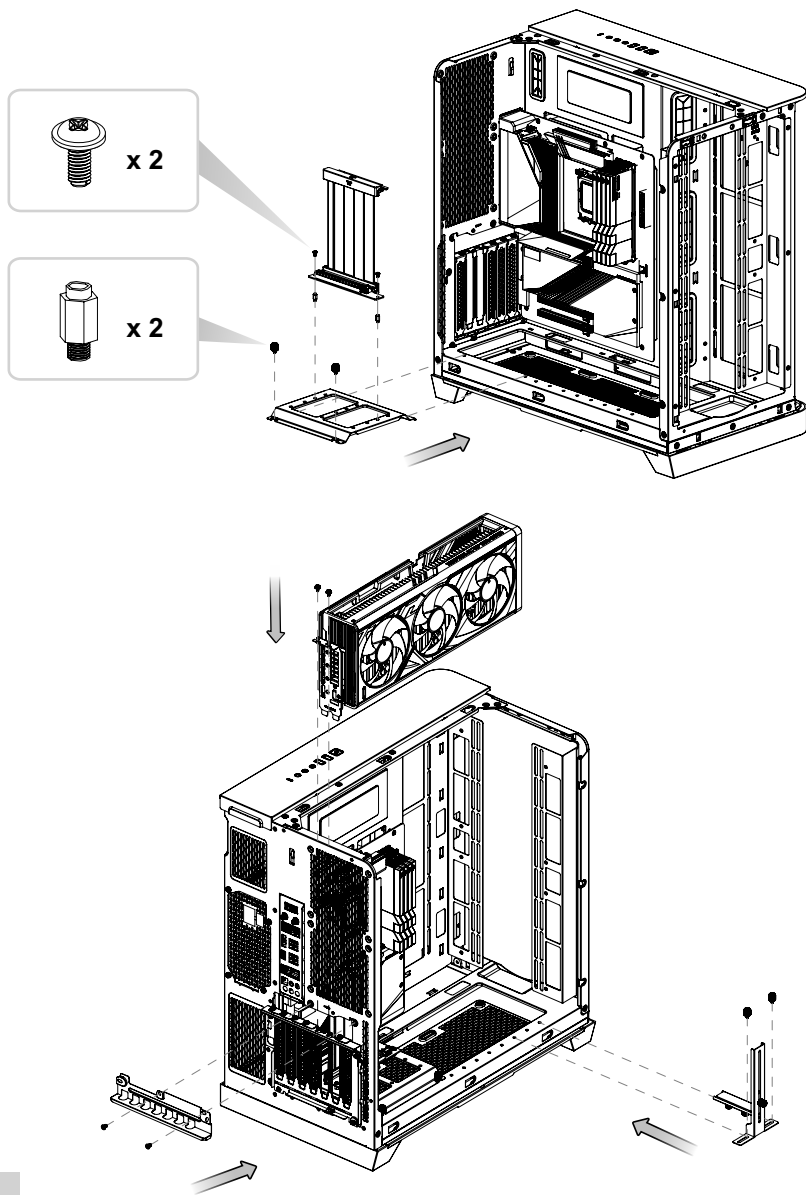**Rear**



120mm x 2

**Bottom**



120mm x 3

Right

120mm x 3


**Front**

120mm x 3
or
140mm x 2
or
200mm x 2

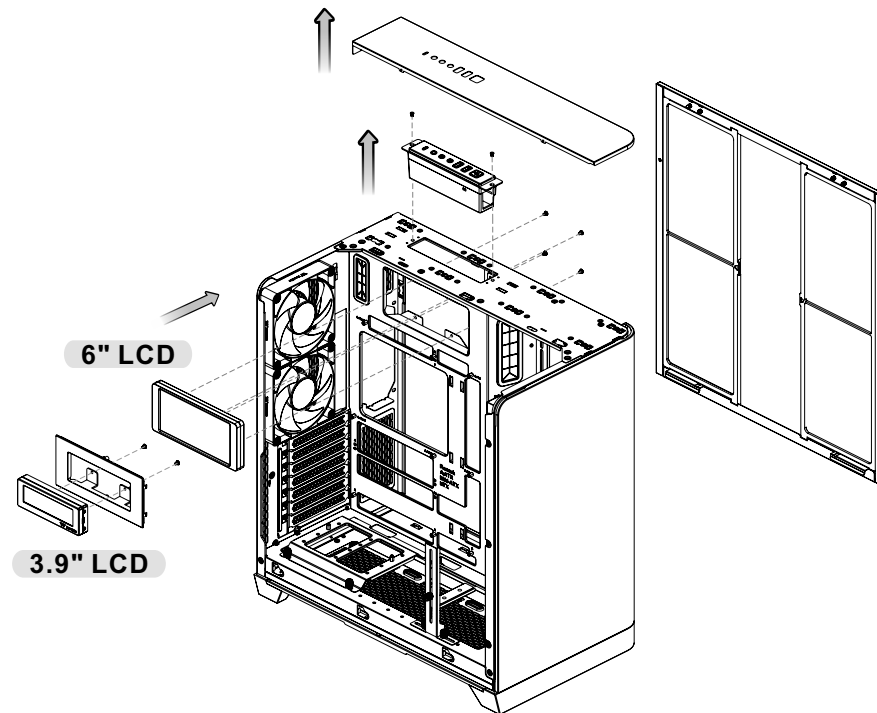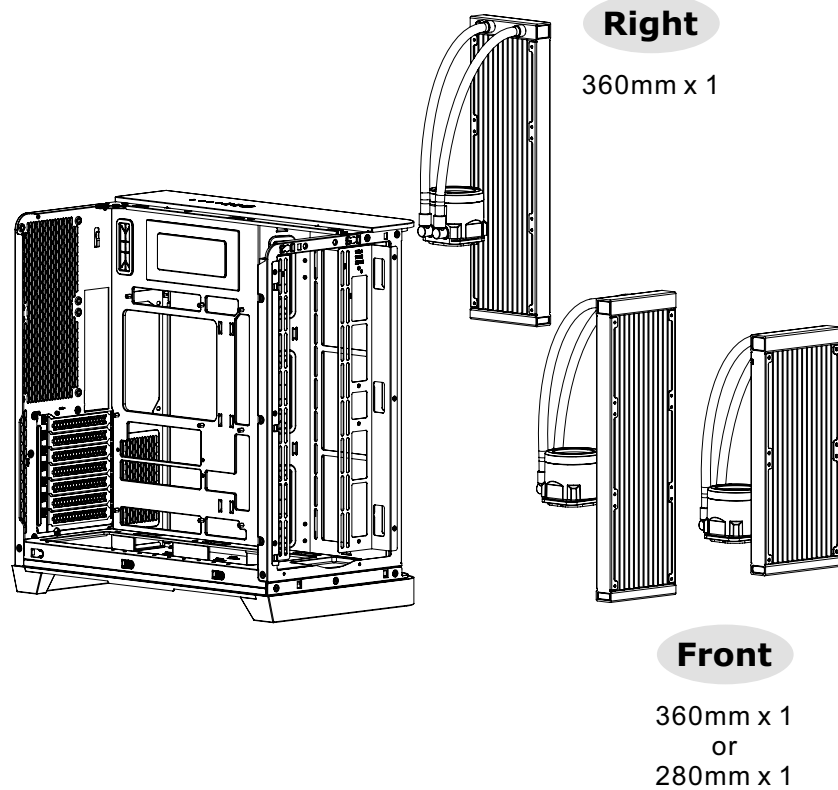

* 3.9" / 6" LCD Screen Kit is not included.

I/O Port

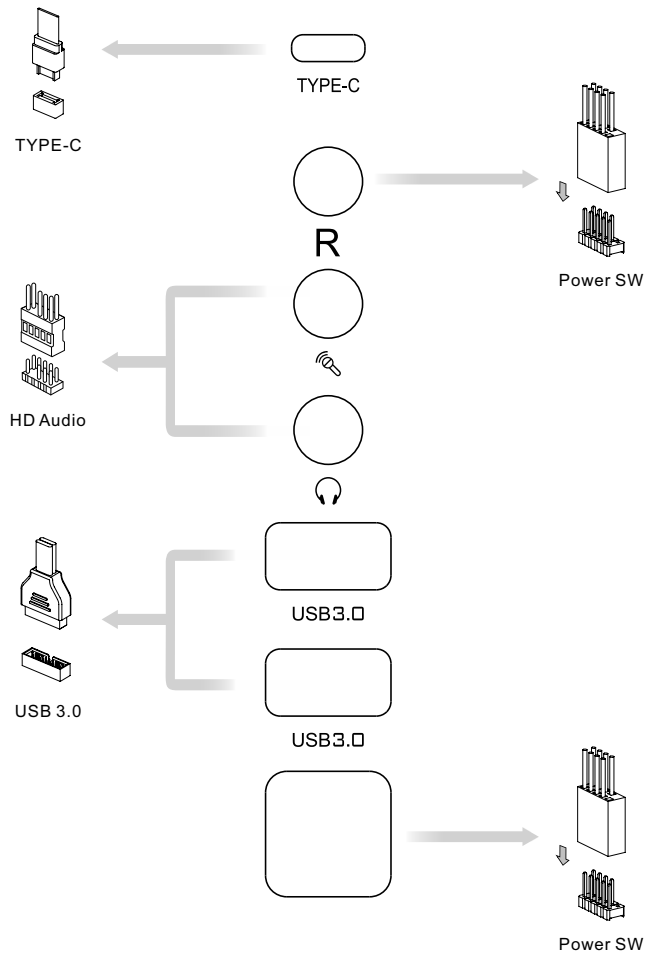

Motherboard Header Diagram

