


© 2024 Thermaltake Technology Co., Ltd. All Rights Reserved. 2024.07 All other registered trademarks belong to their respective companies. www.thermaltake.com



* thermaltake

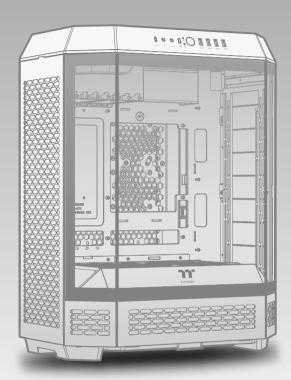

• Picture is for reference only

The Tower 600

User's Manual Benutzerhandbuch Mode d'emploi Manual del usuario Manuale dell'utente Manual do Utilizador

安裝説明書 用戶手冊ユーザーズマニュアル Руководство пользователя kullanıcı elkitabı (EEE Yönetmeliğine Uygundur) คู่มือการใช้

TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. http://ttpremium.com

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,

Thank you for choosing Thermaltake.

As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- · Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website http://www.thermaltake.com/

Global Facebook https://www.facebook.com/ThermaltakeInc

Taiwan Facebook http://www.facebook.com/ThermaltakeTW

Global community forums http://community.thermaltake.com

CONTENTS

Chapter 1. Product Introduction

1.0	Specification ·····	01
1.1	Accessory ·····	02
1.2	Warning and Notice ·····	03


Chapter 2. Installation Guide

2.0	Remove Components	06
2.1	Power Supply Unit (PSU) Installation	07
2.2	Motherboard Installation	08
2.3	HDD Installation	09
2.4	VGA Card Installation	11
2.5	Air Cooling Installation	13
2.6	AIO Liquid Cooling Installation	14
2.7	I/O Connection	15
2.8	Remove Filters	16


Case Type	Mid Tower				
Dimension (H*W*D)	550 x 420 x 286.4 mm (21.65 x 16.54 x 11.28 inch)				
Side Panel	Tempered Glass x 3				
Material	SPCC				
Cooling System	Top (exhaust): 140 x 140 x 25 mm CT140 fan (1500 rpm, 30.5 dBA) x 2				
Drive Bays	1 x 3.5", 1 x 2.5" or 3 x 2.5"				
Expansion Slots	7				
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)				
I/O Port	USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 4, HD Audio x 1				
PSU	Standard PS2 PSU (optional)				
	Тор	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm		
	Right Side	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	3 x 140 mm, 2 x 140 mm, 1 x 140 mm		
Fan Support	Left	3 x 120 mm, 2 x 120 mm, 1 x 120 mm			
ган Зирроп	Rear	2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm		
	Power Cover	1 x 120 mm	1 x 140 mm		
	Bottom	1 x 120 mm	1 x 140 mm		
Radiator Support	Right Side (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	1 x 420 mm, 1 x 280 mm,1 x 140 mm		
Radiator Support	Left Side (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm			
	CPU cooler height limitation	210 mm			
Clearances	VGA length limitation	280 mm (With power cover) 400 mm (Without power cover)			
	PSU length limitation	220 mm			

Figure	Part Name	Q'ty	Used For
	Screw #6-32 x 6 mm	15	PSU / PCI-E slot plate
	Screw #6-32 x 6 mm	20	Motherboard / 3.5" HDD
	Screw M3 x 5 mm	12	2.5" HDD / SSD
	Fan Screw #6-32 x 29 mm	8	Case Fan
e mm	Screw Ø 5 x 10 mm	8	Case Fan
	Screw #6-32 x 6 mm	2	Bracket
& Jum	Screw PT_3 x 6 mm	5	VGA Clamp / Riser Cable Bracket-B
	Stand-off #6-32 x 6.5 mm	3	Backup
⇔ ■	Nut setter	1	Motherboard Stand-off
(Emmana	PCI-E slot plate	7	Backup
SPEAKER	Buzzer	1	Motherboard Alarm
TUF	Side Plate Clip	6	Backup
	Bottom Front Panel	1	3.9" LCD Screen Kit
	VGA Clamp	1	VGA Stabilization
	Riser Cable Bracket-A	1	Riser Cable
•••	Riser Cable Bracket-B	1	Riser Cable
	Cable Ties	10	Cable Management
THE THE	Velcro-1 meter	1	Cable Management


Chassis dimension

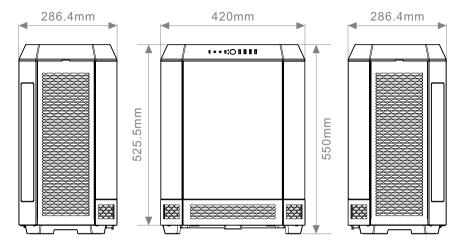


Motherboard Compatibility: ITX / mATX / ATX

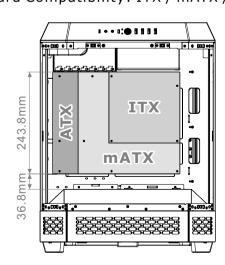


CPU cooler max height: 210mm

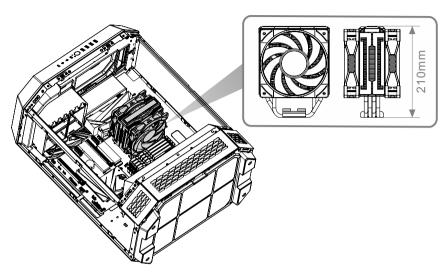



PSU max length: 220mm

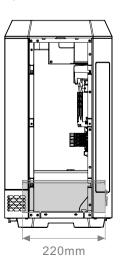

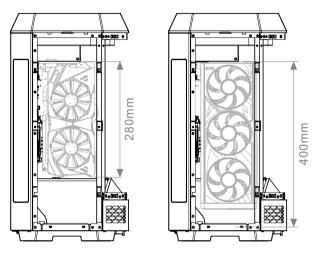


Radiator max length: 456 mm

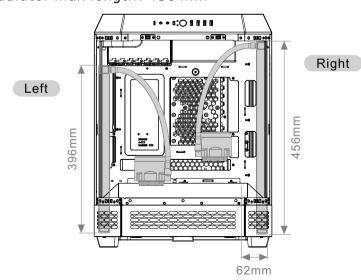


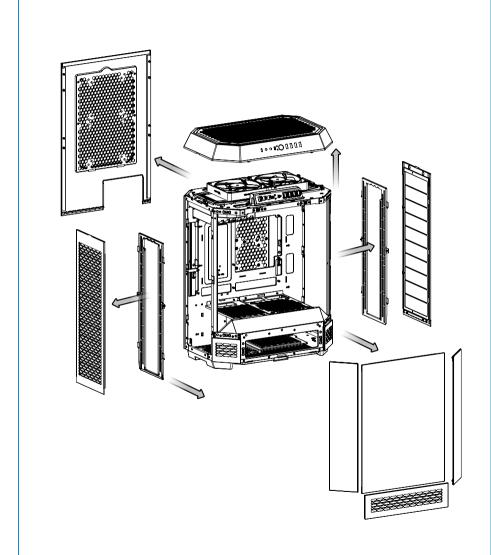






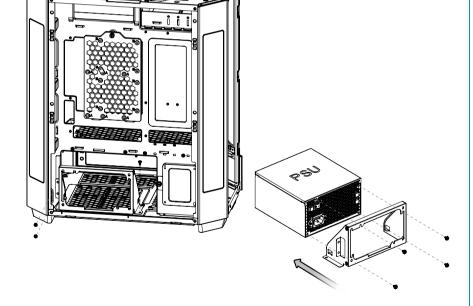


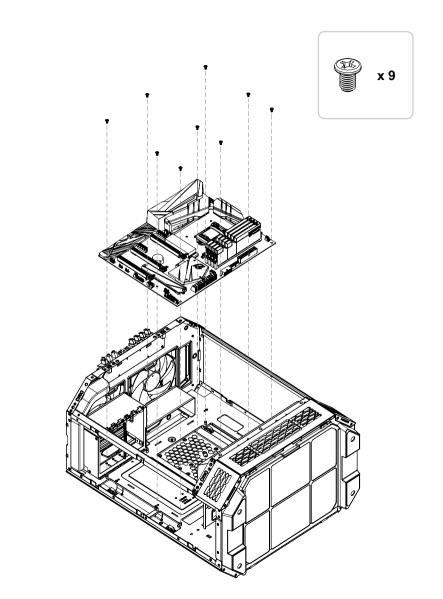



The Tower 600

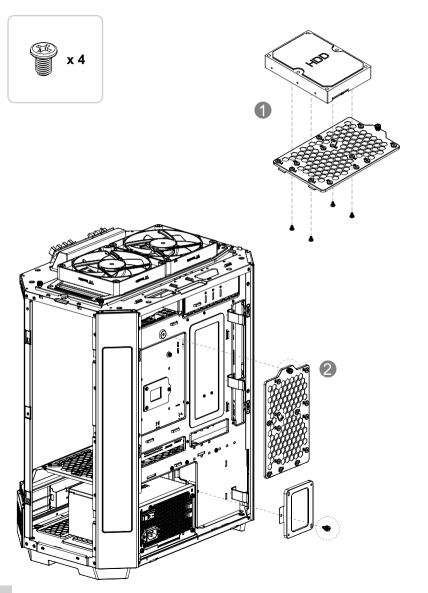


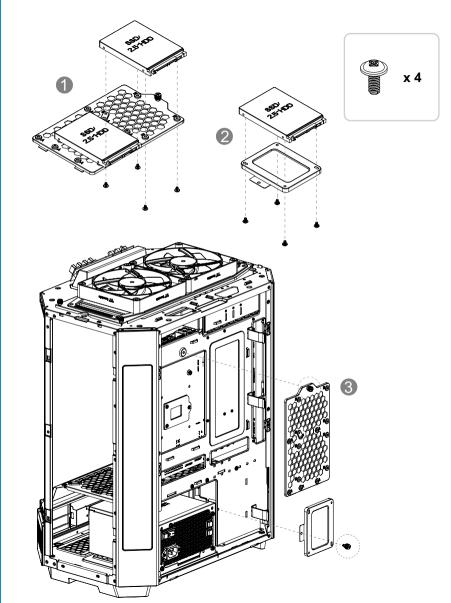



09


VGA Card Installation


The Tower 600 Type-B

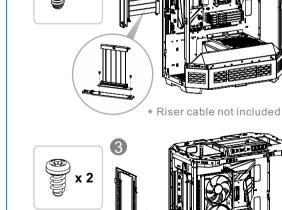



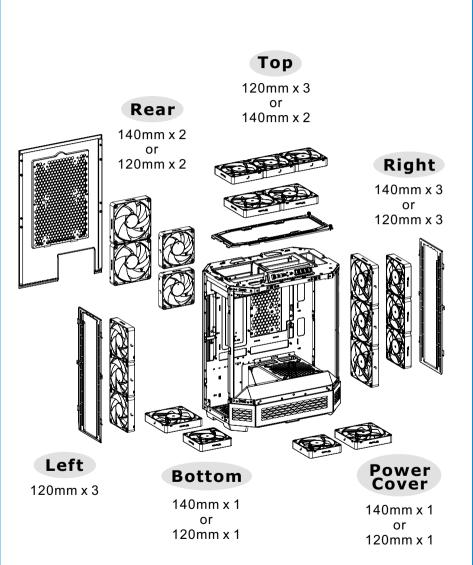

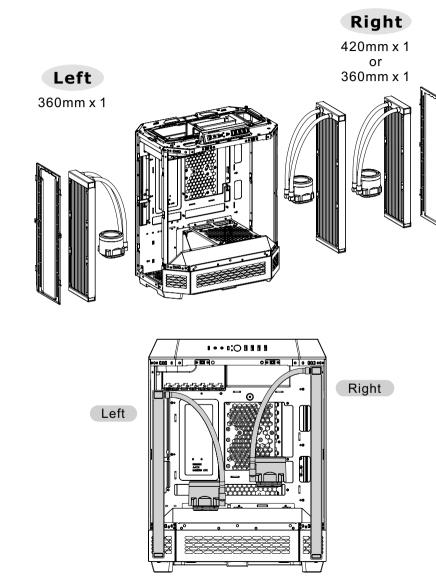


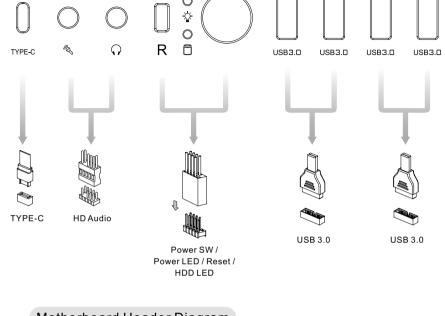


I/O Connection

Motherboard Header Diagram

The Tower 600



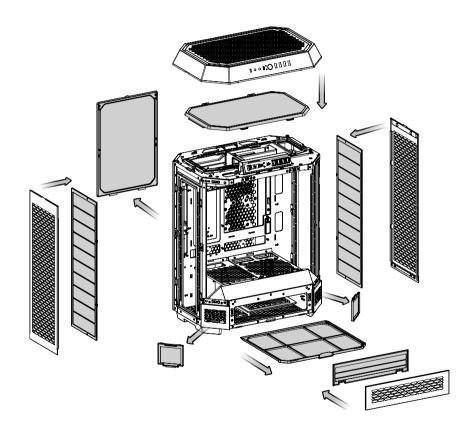

Remove Filters

The Tower 600

15 16